


Product Code: CSPGM2075PW

Luckinslive 434448034

Description: Smart GridPro Scenario Switch

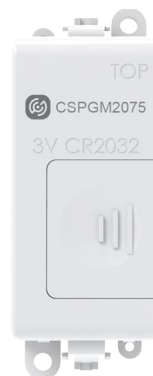

UK PS&TI



## General Information

|                              |                             |                                      |
|------------------------------|-----------------------------|--------------------------------------|
| Insert Colour                | Polar White                 |                                      |
| Materials                    | Body & Insert: Nylon        | Switch: Polycarbonate                |
| Operating Voltage (DC)       | 3                           |                                      |
| Battery Type                 | CR 2032 (Supplied)          |                                      |
| Battery Lifetime (Approx.)   | 300 Days (Dependent On Use) |                                      |
| Protocol                     | Zigbee                      | Signal Transmission Frequency 2.4GHz |
| Open Air Wireless Range (M)  | <50                         |                                      |
| Indicator Colour             | Blue                        |                                      |
| Minimum Back Box Depth (mm)  | 25 (35 Flat Plate)          |                                      |
| Ingress Protection           | IP20                        |                                      |
| Working Humidity             | 0%-90%RH                    |                                      |
| Operational Temperature (°C) | -5 to +40                   |                                      |
| Warranty (Years)             | 3                           |                                      |

**Standards** BS EN 62368-1, BS EN 62479, BS EN 50663, ETSI EN 301 489-1, ETSI EN 301 489-17 & EN 300 328 V2.2.2

## Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.

**Components Supplied** Smart Scenario Switch, CR 2032 Battery, Reset Key, Instruction Manual

**Installation Overview** Utilises inserts and plates in the GridPro range  
Wireless pairs to ClickSmart+ app  
Single and multiple presses can be set to activate devices via the app "Tap To Run" setup

**Programming Information** With hub and app setup with sensor having battery installed, using the pin supplied press the reset button for five seconds and the sensor LED will start flashing. Must be paired with hub via app.

