SYLVANIA

ToLEDo Retro Ball ToLEDo RT Ball V5 CL 470LM 827 B22 SL 0029501



Product features

- Perfect for decorative and general lighting applications and creates a warm ambience similar to traditional lamps
- The versatile ToLEDo Retro ball range is the ideal replacement for halogen and incandescent lamps and perfect for chandeliers and decorative applications
- Same look, size and functionality as incandescent lamps
- Omni-directional light distribution
- Gives same sparkling light effect as the incandescent lamp
- Dimensionally identical to incandescent lamps fits all fixtures
- Environment-friendly no mercury and lower CO2 emissions

PRODUCT OVERVIEW

Product name	ToLEDo RT Ball V5 CL 470LM 827 B22 SL
Technology	LED
Watt (Rated) (W)	4.5
Туре	LED exchangeable
Cap/Base	B22
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Warranty	3 years
Luminous flux (Im)	470
Colour temperature (K)	2700
Light colour	Homelight
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1
Product Voltage (V)	230
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288295015

DATA TABLE

General data	
Product name	ToLEDo RT Ball V5 CL 470LM 827 B22 SL
Technology	LED
Watt (Rated) (W)	4.5
Туре	LED exchangeable
Cap/Base	B22
Fixture rating	Open

SYLVANIA

ToLEDo Retro Ball *ToLEDo RT Ball V5 CL 470LM 827 B22 SL* 0029501


Concret emplication	Legenitality Decidential & Concurrent
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C+40°C
Performance ambient temperature Tq (°C)	25
Warranty	3 years
Optical data	
Luminous flux (Im)	470
Luminous flux (Rated) (Im)	470
Colour temperature (K)	2700
Light colour	Homelight
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal	70
life (%)	
Electrical data	
Equivalent watt (W)	40
Product Voltage (V)	230
Control gear required	No
Transformer required	No
Dimmable	No
Inrush Current (A)	6.3
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 16A B Breaker	13
Lifetime data	
Lifetime data	
Lifespan L70 B50	15000
Lifespan L70 B50 Average life (Nominal) (h)	15000
Lifespan L70 B50	
Lifespan L70 B50 Average life (Nominal) (h)	15000
Lifespan L70 B50 Average life (Nominal) (h) Average life (Rated) (h) Physical data	15000 15000
Lifespan L70 B50 Average life (Nominal) (h) Average life (Rated) (h) Physical data Nominal Product Length (mm)	15000
Lifespan L70 B50 Average life (Nominal) (h) Average life (Rated) (h) Physical data Nominal Product Length (mm) Nominal Product Diameter (mm)	15000 15000 76.5
Lifespan L70 B50 Average life (Nominal) (h) Average life (Rated) (h) Physical data Nominal Product Length (mm)	15000 15000 76.5 45
Lifespan L70 B50 Average life (Nominal) (h) Average life (Rated) (h) Physical data Nominal Product Length (mm) Nominal Product Diameter (mm)	15000 15000 76.5 45
Lifespan L70 B50 Average life (Nominal) (h) Average life (Rated) (h) Physical data Nominal Product Length (mm) Nominal Product Diameter (mm) Weight (kg)	15000 15000 76.5 45
Lifespan L70 B50 Average life (Nominal) (h) Average life (Rated) (h) Physical data Nominal Product Length (mm) Nominal Product Diameter (mm) Weight (kg) Packaging	15000 15000 76.5 45 0.045
Lifespan L70 B50 Average life (Nominal) (h) Average life (Rated) (h) Physical data Nominal Product Length (mm) Nominal Product Diameter (mm) Weight (kg) Packaging Single packaging type	15000 15000 76.5 45 0.045 Carton
Lifespan L70 B50 Average life (Nominal) (h) Average life (Rated) (h) Physical data Nominal Product Length (mm) Nominal Product Diameter (mm) Weight (kg) Packaging Single packaging type Product EAN number	15000 15000 76.5 45 0.045 Carton 5410288295015
Lifespan L70 B50 Average life (Nominal) (h) Average life (Rated) (h) Physical data Nominal Product Length (mm) Nominal Product Diameter (mm) Weight (kg) Packaging Single packaging type Product EAN number Packaging single length / height (cm)	15000 15000 76.5 45 0.045 Carton 5410288295015 9.5
Lifespan L70 B50 Average life (Nominal) (h) Average life (Rated) (h) Physical data Nominal Product Length (mm) Nominal Product Diameter (mm) Weight (kg) Packaging Single packaging type Product EAN number Packaging single length / height (cm) Packaging single width (cm)	15000 15000 76.5 45 0.045 Carton 5410288295015 9.5 5.0
Lifespan L70 B50 Average life (Nominal) (h) Average life (Rated) (h) Physical data Nominal Product Length (mm) Nominal Product Diameter (mm) Weight (kg) Packaging Single packaging type Product EAN number Packaging single length / height (cm) Packaging single depth (cm)	15000 15000 76.5 45 0.045 Carton 5410288295015 9.5 5.0 5.0
Lifespan L70 B50 Average life (Nominal) (h) Average life (Rated) (h) Physical data Nominal Product Length (mm) Nominal Product Diameter (mm) Weight (kg) Packaging Single packaging type Product EAN number Packaging single length / height (cm) Packaging single depth (cm) Packaging single depth (cm) Units per outer package	15000 15000 76.5 45 0.045 Carton 5410288295015 9.5 5.0 5.0 6
Lifespan L70 B50 Average life (Nominal) (h) Average life (Rated) (h) Physical data Nominal Product Length (mm) Nominal Product Diameter (mm) Weight (kg) Packaging Single packaging type Product EAN number Packaging single length / height (cm) Packaging single depth (cm) Units per outer package Packaging outer width (cm) Packaging outer width (cm)	15000 15000 76.5 45 0.045 Carton 5410288295015 9.5 5.0 5.0 6 4 10.7
Lifespan L70 B50 Average life (Nominal) (h) Average life (Rated) (h) Physical data Nominal Product Length (mm) Nominal Product Diameter (mm) Weight (kg) Packaging Single packaging type Product EAN number Packaging single length / height (cm) Packaging single depth (cm) Packaging single depth (cm) Units per outer package Packaging outer width (cm)	15000 15000 76.5 45 0.045 Carton 5410288295015 9.5 5.0 5.0 6 4 10.7




ToLEDo Retro Ball *ToLEDo RT Ball V5 CL 470LM 827 B22 SL* 0029501

Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Safety message	Not Suitable for totally enclosed fixtures

PHOTOMETRY




TECHNICAL DRAWINGS





ToLEDo Retro Ball *ToLEDo RT Ball V5 CL 470LM 827 B22 SL* 0029501

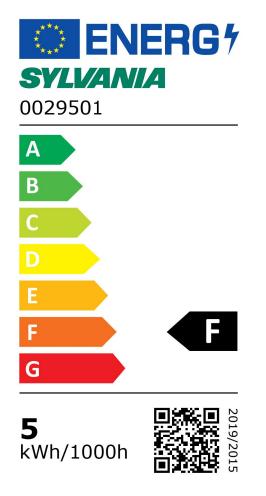



ToLEDo Retro Ball *ToLEDo RT Ball V5 CL 470LM 827 B22 SL* 0029501

