


Linkable site floodlight, designed for industrial applications

LinkStar Kits

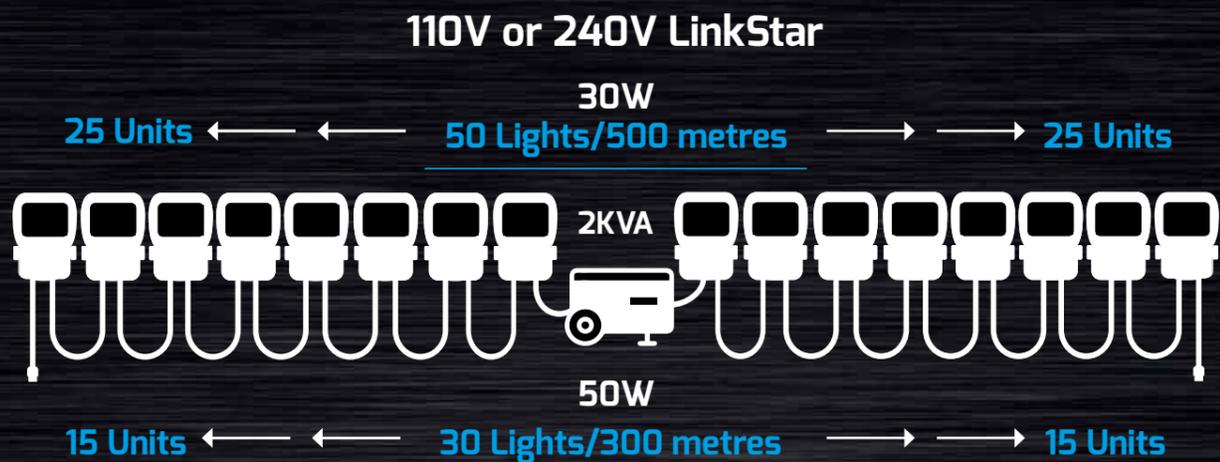

- 3,600-24,000 lumens
- Industrial floodlights
- Strong die-cast aluminium
- IP65 Rated

Single light head with 2.2m tripod stand

Double light head with 2.2m tripod stand

Slim Design

Choose 110V or 240V:
Linkable floodlights



Choose:
Single or double light heads

Choose Light Output:
- 30W 3,600 lumens
- 50W 6,000 lumens
- 100W 12,000 lumens

Supplied with 2.2m swing legged tripod stand and T-Bar Bracket (Twin heads)



LinkStar Light Heads

Light heads can be purchased separately

- 30W Product code: NSLINKSTAR30
- 50W Product code: NSLINKSTAR50
- 100W Product code: NSLINKSTAR100



Scan for multi language information



Optional scaffold bracket
SPSCAFFOLDBRACKET

LinkStar Kits

	30W	50W	100W
☀️ 1 x head	3,600	6,000	12,000
☀️ 2 x heads	7,200	12,000	24,000
MODE	High	High	High
☔ IP	IP65	IP65	IP65
CODE	NSLINKSTAR30/50/100-KIT NSLINKSTAR30/50/100-TWIN-KIT (2 x heads)		

Supplied with: 2.2m swing legged tripod stand and T-Bar Bracket (Twin heads)

Features:

- 110V or 240V Linkable Floodlights
- Strong die-cast aluminium casing with stainless steel fitting
- Designed for industrial applications
- Toughened glass lens



Optional 14 Metre extension lead:
SPCABLE14M