



Zip HydroChill HC10

FILTERED: CHILLED SPARKLING AMBIENT

With 45 litres per hour of chilled, sparkling and ambient filtered water, this counter-top product is ideal for high capacity scenarios where pure-tasting water is needed. This model features push-button controls for ease of use.



MODEL	TAP STYLE	ULTRA VIOLET	CAPACITY (L/HR)	NOMINAL POWER RATING KW	DIMENSIONS W X D X H
HC10IT45	Push Button	N	45 L/hr	0.265 kW @ 230V AC	318mm x 499mm x 470mm

Features and benefits

Pure, clean water

Provide pure-tasting water in an instant, thanks to Zip's 3 micron MicroPurity filtration system, which removes impurities and contaminants.

Environmentally responsible

Create a healthier, greener workplace with no need for plastic bottles.

Caters for high volume usage

The HydroChill range has been designed to cater for commercial settings where large volumes of drinking water are required. In fact, the HydroChill Under-Counter HC50 has the capability to provide up to 150 litres of chilled or sparkling water an hour from a single unit.

Consumables and accessories

Serve clean-tasting water in a professional way by using Zip's table-top glass bottles.

Easy to install

Quick and simple to install and use.

Product detail

Specification type

Product code	HC10IT45
Product name	HydroChill HC10 counter-top 45ltr chilled, ambient and sparkling push button
Cooling Technology	Aluminium fusion block heat exchanger
Factory Temperature Range	5-12°C
Refrigerant gas	Natural gas R290



WARNING R290 is a CFC free, environmentally friendly but highly flammable gas. The product should be installed and operated within the instructions in the supplied manual

Capacity, weights & dimensions

Water Functions	Chilled, Sparkling, Ambient
Capacity (litres per hour)	45 L/hr
Product weight - empty / full	31kg / 35kg
Unit dimensions (W x D x H) mm	318mm x 499mm x 470mm

Plumbing

Whole cold water inlet supply required	Yes
Inlet pipe	15mm
Supply pressure range	2.5bar (Min) - 3.5bar (Max)
Installation	Must comply with current water supply regulations

The minimum water pressure will vary if a limescale filter is installed. Please contact us to discuss your requirements.

Electrical

Nominal power rating kw	0.265 kW @ 230V AC
Power supply option	1x 13amp socket outlet
Installation	Must comply with current IEE regulations

Filtration

Taste & Odour Filtration Kit - available to purchase	HCF3S - Zip MicroPurity filter HD 3 Micron 30 - 80 l/ph with CO2 Regulator
Sterilising UV filtration at point of dispense	No

CO₂ Gas

CO₂ regulator and fittings supplied, cylinder not supplied



STORAGE WARNING CO₂ contains gas and should be installed in a well ventilated area. Refer to installation manual for more information.


Warranty

2 years on-site parts and labour on site

Terms and conditions apply (see supplied manual)


Technical drawings & dimensions

All dimensions in mm

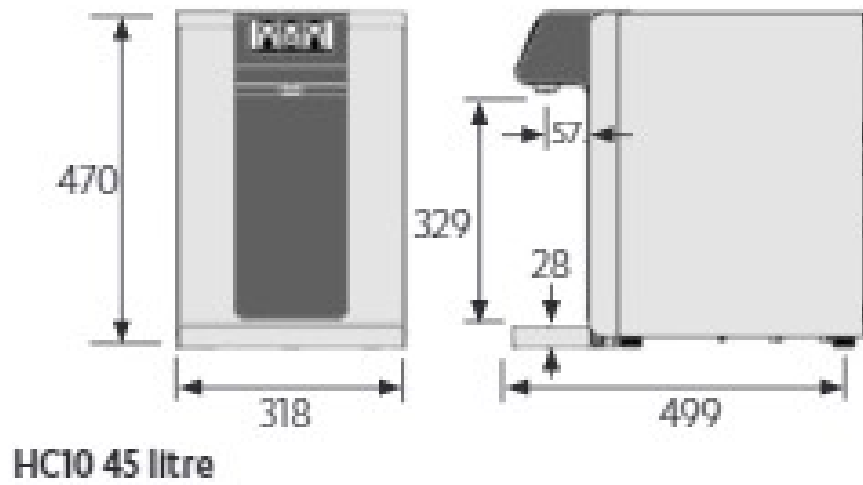

Accessories

Visit specify.zipwater.co.uk to find out more information about Zip HydroChill HC10 Accessories

Image	SKU	Title
	94777	45 Litre Cabinet for HC10
