



Zip HydroChill HC50

FILTERED: CHILLED SPARKLING

The perfect choice for front of house, HydroChill Under-Counter features a number of stylish tap designs. It is the ideal solution for installations that require the unit to be tucked away out of sight. The HC50T2P80 provides chilled and sparkling water from a two spout tap with badge.



MODEL	TAP STYLE	ULTRA VIOLET	CAPACITY (L/HR)	NOMINAL POWER RATING KW	DIMENSIONS W X D X H
HC50T2P80	Spout Tap	N	80 L/hr	0.505 kW @ 230V AC	318mm x 457mm x 554mm

Features and benefits

Pure, clean water

Provide pure-tasting water in an instant, thanks to Zip's 3 micron MicroPurity filtration system, which removes impurities and contaminants.

Environmentally responsible

Create a healthier, greener workplace with no need for plastic bottles.

Caters for high volume usage

The HydroChill range has been designed to cater for commercial settings where large volumes of drinking water are required. In fact, the HydroChill Under-Counter HC50 has the capability to provide up to 150 litres of chilled or sparkling water an hour from a single unit.

Consumables and accessories

Serve clean-tasting water in a professional way by using Zip's table-top glass bottles.

Easy to install

Quick and simple to install and use.

Product detail

Specification type

Product code	HC50T2P80
Product name	HydroChill HC50 under-counter 80ltr chilled & sparkling 2 spout tap with badge
Cooling Technology	Ice bank - double coil
Factory Temperature Range	5-12°C



WARNING R290 is a CFC free, environmentally friendly but highly flammable gas. The product should be installed and operated within the instructions in the supplied manual

Capacity, weights & dimensions

Water Functions	Chilled, Sparkling
Capacity (litres per hour)	80 L/hr
Product weight - empty / full	29kg / 32kg
Unit dimensions (W x D x H) mm	318mm x 457mm x 554mm

Plumbing

Whole cold water inlet supply required	Yes
Inlet pipe	15mm
Supply pressure range	2.5bar (Min) - 3.5bar (Max)
Installation	Must comply with current water supply regulations

The minimum water pressure will vary if a limescale filter is installed. Please contact us to discuss your requirements.

Electrical

Nominal power rating kw	0.505 kW @ 230V AC
Power supply option	1x 13amp socket outlet
Installation	Must comply with current IEE regulations

Filtration

Taste & Odour Filtration Kit - available to purchase	HCF3S - Zip MicroPurity filter HD 3 Micron 30 - 80 l/ph with CO2 Regulator
Sterilising UV filtration at point of dispense	No

CO₂ Gas

CO₂ regulator and fittings supplied, cylinder not supplied



STORAGE WARNING CO₂ contains gas and should be installed in a well ventilated area. Refer to installation manual for more information.


Warranty

2 years on-site parts and labour on site



Terms and conditions apply (see supplied manual)

Technical drawings & dimensions

All dimensions in mm



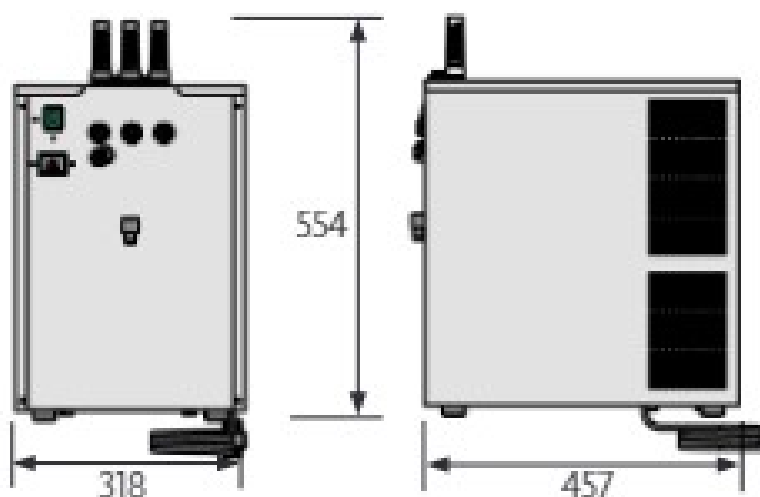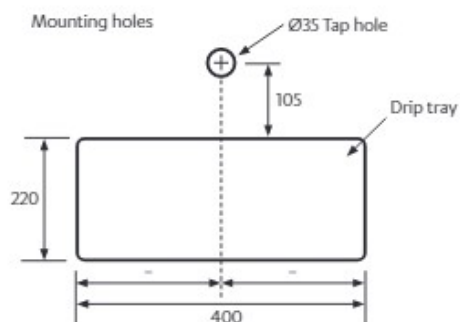


HC50 2 Spout tap with badge



HC50 80 litre

Accessories

Visit specify.zipwater.co.uk to find out more information about Zip HydroChill HC50 Accessories

Image	SKU	Title
 IMAGE COMING SOON	94773	Stainless Steel drip tray 150 x 220mm for HC50 Taps
 IMAGE COMING SOON	94774	Stainless Steel drip tray 400 x 220 mm for HC50 Taps
 IMAGE COMING SOON	94775	Stainless Steel drip tray with drain 400 x 220mm for HC50 Taps