


RCD Switched Sockets - 10mA Passive


-PowerBreaker-

- + Mechanically latched (does not need resetting after a power loss)
- + Red & Green dual flag system to show power on/off
- + High intensity LED power on indicator
- + Cuts the power for added protection against electrocution
- + Twin earth terminals on Twin sockets
- + White sockets fit standard 35mm back box


Type A RCD
BS 7288-2016+A1:2022
10mA

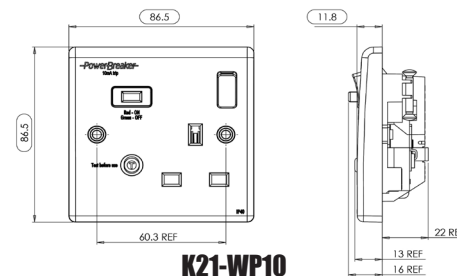


K21-WP10

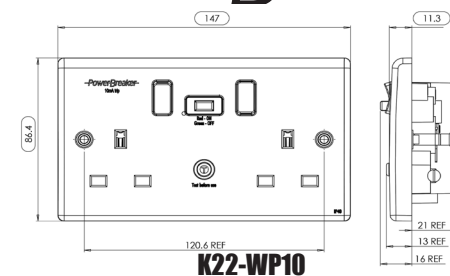

K22-WP10

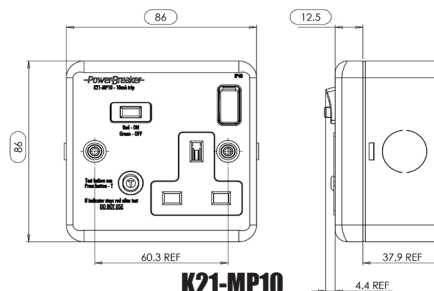

K21-MP10

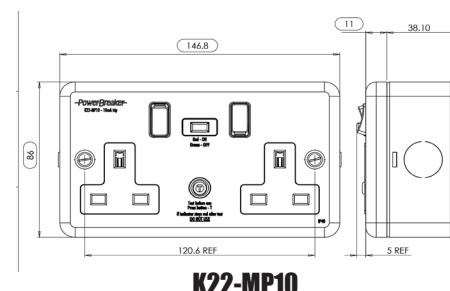

K22-MP10

	K21-WP10	K22-WP10	K21-MP10	K22-MP10
Product Finish	White	White	Metalclad	Metalclad
Barcode	5012739646904	5012739646911	5012739646928	5012739646959
Product Weight	140g	208g	358g	529g
Product Dimensions	86.5 x 86.5 x 12mm	147.5 x 86.5 x 12mm	86 x 86 x 49mm	147.5 x 86.5 x 49mm
Voltage	230V AC ~ 50Hz			
Max Operating Current	13A (13A Inductive)			
IP Rating	IP40			
Rated Trip Current	10mA			
Typical Trip Speed	Less than 20mS (typical)			
RCD Contact Break	Double Pole			
Rated Short Circuit Breaking & Making Capacity	250A			
Rated Conditional Short-Circuit Current	1500A Power Factor Range .93 to .98			
Latching	Mechanical - No need to reset after Power Loss (Passive)			
Responsive To	Pulsating DC earth faults			
Main Housing Material	Urea		Steel & Polycarbonate	
Guarantee	3 Years			
Conforms To	BS 7288:2016+A1:2022, BS1363-2:2016+A1:2018			

**GREEN
BROOK**
ELECTRICAL

Tel: 01279 772 772

Fax: 01279 422 007

Email: sales@greenbrook.co.uk

www.greenbrook.co.uk

