

# JC130012

## Commercial Wall Pack Bulkhead

Novium LED Wall Pack 13/18/28W IP65 IK10 3000/4000K Black

### Features & Benefits

- Multiple Wattage selectable
- Two colour selectable
- Downward beam angle aids in reduction of light pollution
- IP65 and IK10
- Up to 139 LpcW
- Emergency option available



### General Information

Mounting	Wall mounted
Environment	Demanding
Suitable For Zones	Suitable for inside Zone 1
Product Group	LED Bulkhead
Color Finish	Black
Product Range	LED Wall Pack Bulkhead
IK Rating	IK10
Overall Dimensions	165.3 x 263 x 318mm
Width (mm)	165.3
Height (mm)	263
Depth (mm)	318
Product Weight(kg)	2.35
Light Source	LED
Light Source Features	Colour Selectable
Recommended Product Location	Exterior wall mount
Method Of Fix	Wall plate and screw fix
IP Rating	IP65
Origin of manufacturer	China

Warranty	5 Year Warranty (See Website for terms and conditions)
Driver Manufacturer	TCI
LED Manufacturer/Type	2835
Lighting Product Type 1	Wall Mount
Customs Tariff code**	9405119090

Electrical

Voltage Rating	220-240
Primary Running Current(Amp)	0.13
Inrush current(Amps)	10
Operating Frequency Hz	50/60Hz
Secondary running current(mA)	350/500/725
Constant Current or Constant Voltage	CC
Luminaire Circuit Wattage	13/18/28
Class	I
Output Voltage Max/Range (VDC)	33-37.2
Total Harmonic Distortion (THD)%	10
EMC Compliant (EN55015)	Yes
Power Factor Correction	0.9
Input Electrical Connections	Live, neutral, earth
Dimmable	No
Photocell/PIR compatable	Yes

Thermals

Operating Temperature Range °C	-20 to +40
--------------------------------	------------

Performance Data

LED Life (Hours)*	54000
Energy Rating	This product contains a light source of energy efficiency class C
Actual Lumen Output	1700/2500/3500
Lumens Per Circuit Watt	131/139/125
Standard Deviation Colour Matching - SDCM	>6
CRI: Ra	80
Correlated Color Temperature	3000/4000K
Beam Angle °	120
Photometry Available	Yes

Construction



Primary Material	Aluminium
Outer Diffuser	Polycarbonate
Driver Housing	Polycarbonate

Packaging

Product carton overall dimensions(cm)	29.5 x 28 x 17.5cm
Product Packaged Weight(kg)	2.62
Quantity Per Outer Carton	4
Outer carton(L)- cm	63
Outer carton(W)- cm	36.5
Outer carton(H)- cm	37.5
Outer carton Net weight- kg	9.4
Outer carton Gross weight- kg	10.5
Product Bar Code EAN-13 Number	5052544120831
Outer carton Bar Code ITF-14 Number	15052544120838

## Standards & Approvals

Manufactured In Accordance To	BS EN 60598-2-1
CE Marked	Yes
UKCA Marked	Yes
Date code/Purchase order No.	Yes
WEEE Symbol	Yes
Certificate Of Conformity	Available on request
Accredited Members	LIA, ISO9001-2015, ISO14001-2015

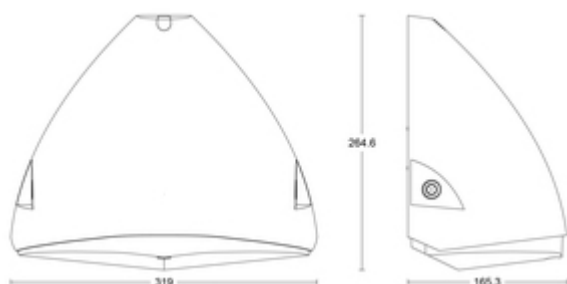

\*Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

\*\*JCC Lighting Limited makes every effort to ensure that the Customs Tariff information in this document is timely and accurate. However, it's not possible for us to assure the absolute veracity and completeness of that information, as errors may occur. The placement of any inaccurate tariff information is completely unintentional. JCC Lighting Limited reserves the right, in its sole discretion, to correct any errors or omissions to the tariff code and to make any and all changes contained in this document at any time and without notice. It is the sole responsibility of the importer to ensure that the commodity code advised is correct for the products/goods being supplied by JCC Lighting Limited. JCC Lighting Limited does not assume any liabilities, losses, costs, and expenses arising out of or related to the importers use of this commodity code or the information related to the import of any JCC Lighting products.

