


JC030038

Commercial Linear UGR Emergency

Commercial Linear UGR19 4FT 24W/27W/30W/33W 3CCT Microwave On/Off Self-test Emergency

Features & Benefits

- UGR <19 as standard, designed to comply with BS EN 12464-1 lighting of workspace.
- Four Wattage output selectable allowing you to choose between 22W, 25W, 28W and 31W
- CCT colour selectable allowing you to choose between 3000K, 4000K and 5700K
- DALI dimmable and Microwave on/off options
- Self-test emergency as standard
- Anti- tamper end caps
- Up to 132 LpcW
- Flicker free driver

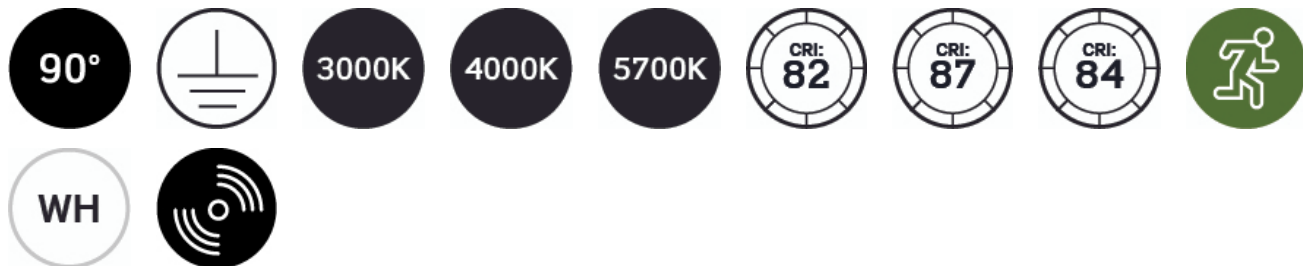

General Information

Mounting	Surface Mount
Environment	Indoor
Suitable For Zones	Outside Zone 2
Product Group	Surface Linear
Color Finish	White
Product Range	Commercial Linear
Overall Dimensions	1200 x 164 x 48mm
Length (mm)	1200
Width (mm)	164
Height (mm)	48
Product Weight(kg)	2.59
Light Source	LED
Method of fix	Screw fix or suspend
IP Rating	IP20

Origin of manufacturer	Made in China
Warranty	5 Year Warranty (5 years on batteries) (See Website for terms and conditions)
Mounting height	2.5-6m
Driver manufacturer	AGT
LED manufacturer/type	Jufei/2835
Customs Tariff code**	9405119090

Electrical

Voltage Rating	220-240V~
Primary Running Current(Amp)	0.09-0.24
Inrush current(Amps)	18
Operating Frequency Hz	50/60Hz
Secondary running current(mA)	245/280/315/350
Constant Current or Constant Voltage	CC
Luminaire Circuit Wattage	24/27/30/33
Class	I
Output Voltage Max/Range (VDC)	60-125
Total Harmonic Distortion (THD)%	15
EMC Compliant (EN55015)	Yes
Power Factor Correction	0.95
Input Electrical Connections	Permanent Live, Switched Live, Earth Neutral
Dimmable	No

Emergency Data

Load Voltage(DC)	50-300
LOR % in Emergency Mode	13 to 9 %
Minimum Battery run time	3 hours
Recharge Time	24 hours

Battery Data

Battery Specification	LiFePO4 3.2V 3.2Ah
Battery Type	LiFePO4
Nominal battery current	130mA
Charge Current	300mA
Recharge Time	24 hours
Deep Discharge Protection	Yes
Battery Total Weight(kg)	0.84

Thermals

Thermal Cut Out	Yes
Operating Temperature Range °C	0-60

Performance Data

LED Life (Hours)*	60000
Energy Rating	This product contains a light source of energy efficiency class D/C
Actual Lumen Output	2860/3300/3650/4020
Lumens Per Circuit Watt	130/132/130/130
Standard Deviation Colour Matching - SDCM	3
Color Rendering Index	80-89
CRI: Ra	82/86/83
Correlated Color Temperature	3000/4000/5700K
Beam Angle °	90
LOR (Light Output Ratio) %	100
Photometry Available	Yes

Controls and Sensors

Detection Distance	6m
Detection Motion Speed	0.5m/sec
Installation Height	2.5-6m
Detection area	100% / 75% / 50% / 25%
Detection angle	Ceiling mount 150°
Hold time	5S/30S/60S/3min/5min/10min/20min/30min
Microwave frequency	5.8 GHz ±74.9 MHz.ISM wave band
Daylight Sensor (On/Off) (NOT Daylight Harvesting)	2Lux/10Lux/25Lux/50Lux/Disable

Construction



Primary Material	Pressed Steel
Inner Diffuser	PMMA
Outer Diffuser	PMMA
LED Brand	Jufei
Lens	Polycarbonate
Driver Housing	Metal

Packaging

Product carton overall dimensions(cm)	127.3 x 17 x 5.2cm
Product Packaged Weight(kg)	2.9
Quantity Per Outer Carton	6
Outer carton(L)- cm	129.7
Outer carton(W)- cm	36.8
Outer carton(H)- cm	19.7
Outer carton Net weight- kg	17.4
Outer carton Gross weight- kg	18.54
Product Bar Code EAN-13 Number	5052544119477
Outer carton Bar Code ITF-14 Number	15052544119474

Standards & Approvals


Manufactured in accordance to	BS EN 60598-2-1
CE Marked	Yes
UKCA Marked	Yes
Date code/Purchase order No.	Yes
WEEE symbol	Yes
Certificate Of Conformity	Available on request
Accredited Members	LIA, ISO9001-2015, ISO14001-2015

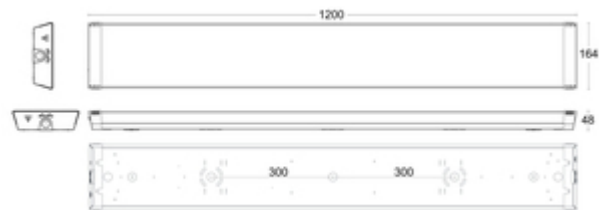

Non-replaceable light source



Replaceable control gear
by a professional





*Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

**JCC Lighting Limited makes every effort to ensure that the Customs Tariff information in this document is timely and accurate. However, it's not possible for us to assure the absolute veracity and completeness of that information, as errors may occur. The placement of any inaccurate tariff information is completely unintentional. JCC Lighting Limited reserves the right, in its sole discretion, to correct any errors or omissions to the tariff code and to make any and all changes contained in this document at any time and without notice. It is the sole responsibility of the importer to ensure that the commodity code advised is correct for the products/goods being supplied by JCC Lighting Limited. JCC Lighting Limited does not assume any liabilities, losses, costs, and expenses arising out of or related to the importers use of this commodity code or the information related to the import of any JCC Lighting products.

JCC Lighting LTD, Lux Park, Chichester Business Park, City Fields Way, Tangmere, Chichester, West Sussex, PO20 2FT.

Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk

Company Registration Number: 03044848 | VAT Number: 918544112

This document is uncontrolled if printed, all information is subject to change

Version 51 [01/05/2024]