

JC100041

Skypack QR HO

Skypack QR High Output 6ft Twin IP20 4000K 90W 11500lm

Features & Benefits

- Intelligent press release buttons for simple installation
- Ultra efficient up to 133 lumens per circuit Watt
- Suspended LED tray for easy installation
- Press fit terminals loop in loop out
- Rear and end conduit entry points
- Emergency and microwave dimmable options



General Information

Mounting

Trade Name

Environment

Product Group

Color Finish

Product Shape

Product Range

Overall Dimensions

Length (mm)

Width (mm)

Height (mm)

Product Weight(kg)

Light Source

Light Source Features

Recommended product location

Method of fix

IP Rating

Origin of manufacturer

Surface Mounted

Skypack™ QR High Output

Indoor

LED - Surface

White

Rectangular

Skypack™

1828 x 70 x 76.5

1828

70

76.5

3.16

LED

White

Domestic, Commercial and Industrial Applications

Surface with Conduit Entry

IP20

Made In China

Warranty	5 Year Warranty (2 year on batteries) (See Website for terms and conditions)
Driver manufacturer	Ledtu
LED manufacturer/type	Runlite 2835
Lighting Product Type 1	Linear Lighting
Customs Tariff code**	9405119090

Electrical

Voltage Rating	220-240
Primary Running Current(Amp)	2 x 0.3
Inrush current(Amps)	2 x 20A
Operating Frequency Hz	50/60Hz
Secondary running current(mA)	2 x 1050
Constant Current or Constant Voltage	CC
Luminaire Circuit Wattage	90
Class	I
Output Voltage Max/Range (VDC)	2 x 27-45
Total Harmonic Distortion (THD)%	0.2
EMC Compliant (EN55015)	Yes
Power Factor Correction	0.9
Input Electrical Connections	Live, Earth & Neutral
Dimmable	No

Thermals

Operating Temperature Range °C	0 to +26
--------------------------------	----------

Performance Data

LED Life (Hours)*	54000
Energy Rating	This product contains a light source of energy efficiency class E
Actual Lumen Output	11500
Lumens Per Circuit Watt	128
Color Rendering Index	80-89
CRI: Ra	80
Correlated Color Temperature	4000K
Beam Angle °	120
LOR (Light Output Ratio) %	100
Photometry Available	Yes

Construction




Primary Material	Steel
Outer Diffuser	Polycarbonate

Packaging

Quantity Per Outer Carton	6
Outer carton(L)- cm	188
Outer carton(W)- cm	31
Outer carton(H)- cm	23
Outer carton Net weight- kg	19
Outer carton Gross weight- kg	20.2
Product Bar Code EAN-13 Number	5052544104862
Outer carton Bar Code ITF-14 Number	15052544104869

Standards & Approvals

Manufactured in accordance to	BS EN 60598:2015, 2-1
CE Marked	Yes
UKCA Marked	Yes
Date code/Purchase order No.	Yes
WEEE symbol	Yes
Certificate Of Conformity	Available on request
Accredited Members	LIA, ISO9001-2015, ISO14001-2015

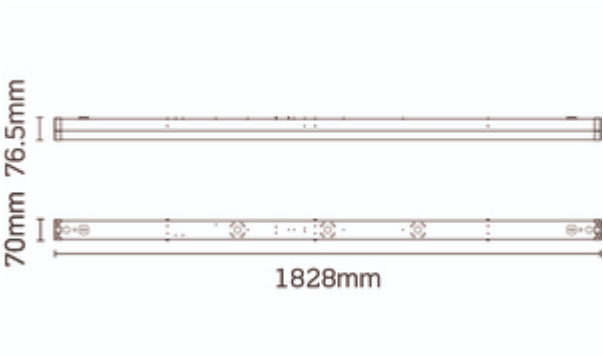

*Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

**JCC Lighting Limited makes every effort to ensure that the Customs Tariff information in this document is timely and accurate. However, it's not possible for us to assure the absolute veracity and completeness of that information, as errors may occur. The placement of any inaccurate tariff information is completely unintentional. JCC Lighting Limited reserves the right, in its sole discretion, to correct any errors or omissions to the tariff code and to make any and all changes contained in this document at any time and without notice. It is the sole responsibility of the importer to ensure that the commodity code advised is correct for the products/goods being supplied by JCC Lighting Limited. JCC Lighting Limited does not assume any liabilities, losses, costs, and expenses arising out of or related to the importers use of this commodity code or the information related to the import of any JCC Lighting products.

