


Colour Switchable Fixed Polycarbonate Downlights

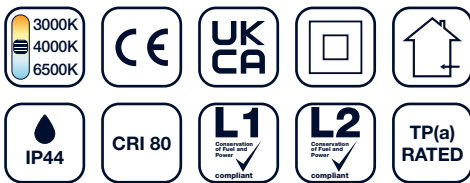

- Colour switchable between 3000K/4000K/6500K
- Compact integrated driver for easy installation and shallow ceiling voids

Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70 40,000hrs
- Operating Temperature: -20°C / 40°C
- Body: Polycarbonate
- Diffuser: Polycarbonate
- Warranty: 5 Years

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam (°)	Cutout (mm)	Size (mm)	Finish
AU-DDL10CS	Triac Dim	10	3000 / 4000 / 6500	915 - 1000	100	100	90	120 x 60	White
AU-DDL15CS	Triac Dim	15	3000 / 4000 / 6500	1400 - 1550	103	100	120	150 x 60	White
AU-DDL20CS	Triac Dim	20	3000 / 4000 / 6500	2000 - 2250	113	100	170	200 x 65	White
AU-DDL25CS	Triac Dim	25	3000 / 4000 / 6500	2400 - 2600	104	100	200	230 x 65	White
AU-DL10CS	Non Dim	10	3000 / 4000 / 6500	1000 - 1100	110	100	90	120 x 60	White
AU-DL15CS	Non Dim	15	3000 / 4000 / 6500	1600 - 1700	113	100	120	150 x 60	White
AU-DL23CS	Non Dim	23	3000 / 4000 / 6500	2500 - 2700	117	100	170	200 x 65	White
AU-DL30CS	Non Dim	30	3000 / 4000 / 6500	3200 - 3450	115	100	200	230 x 65	White
AU-DLEMB2B	3 Hour Maintained 8W Emergency Pack - Downlight								