


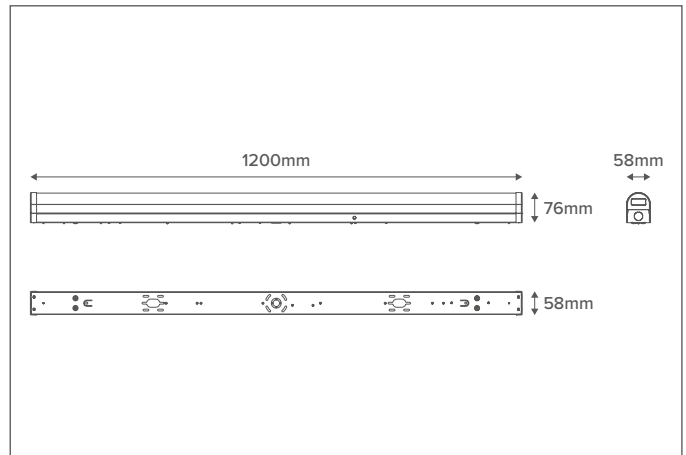

General Information

Dimensions (mm)	1200 (L) x 63 (W) x 80 (D)
Materials	Base: Powder Coated Aluminium; Opaque Diffuser: Polycarbonate
Colour	(RAL9003)
Base Finish	White
Product Weight (Kg)	1.02
Ingress Protection	IP20
Impact Rating (IK)	06
Flammability Rating	TP(a)
Mounting	Ceiling or Wall
Warranty (Years)	5

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50)
Safety Class	I
Circuit Wattage (W)	20/25/30/35
Input Current (A)	250
Inrush Current	60A (5ms)
Power Factor	0.9
Efficiency (%)	90
Operating Temperature (°C)	-20 to +45
Maximum Critical Temperature (°C)	80
Input Terminations	Push-fit Terminals
LED Driver	Integrated

Luminaire Output

LED Wattage	20	25	30	35
Circuit Wattage	20	25	30	35
Typical Luminous Flux (3000K)	2200	2750	3300	3850
Typical Luminous Flux (4500K)	2400	3000	3600	4200
Typical Luminous Flux (6500K)	2200	2750	3300	3850
Efficacy (3000K)	110	110	110	110
Efficacy (4500K)	120	120	120	120
Efficacy (6500K)	110	110	110	110
Beam Angle (°)	120			
Colour Temperatures (K)	3000, 4500, 6500			
Flicker Free	Yes			
Colour Rendering Index (CRI)	80			
LED Lifetime (L70)	50000			

Dimming Information


Dimmable	No
----------	----

Sensor Information


Light Level Settings (Lux)	2, 10, 50, Disable
HF System	5.8GHZ; <0.3Mw
Time Delay Settings	5s / 90s / 5min / 15min

Compatible Accessories


OSUSS15 - 2 x Suspension Cable for Linear Luminaires

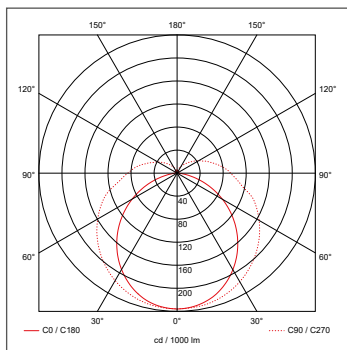


20W

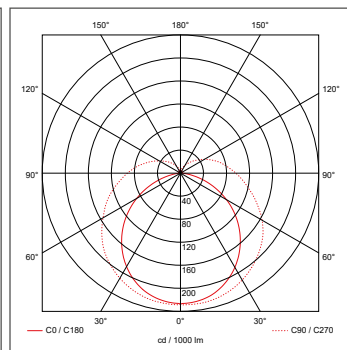

25W

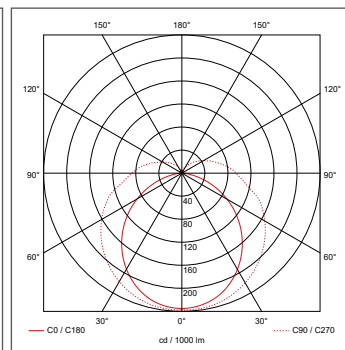

30W

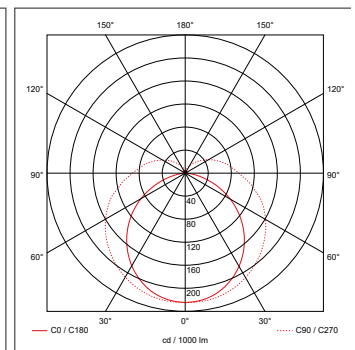

35W



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 300640
E: sales@oviaUK.com | W: oviaUK.com



Catalogue



Section



DoC



Installation

