
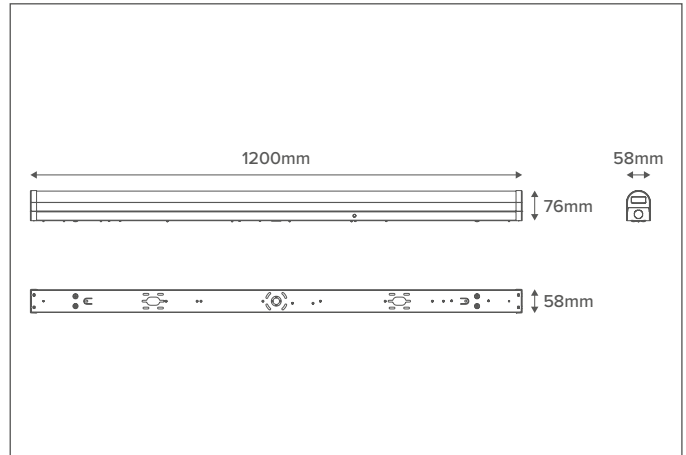


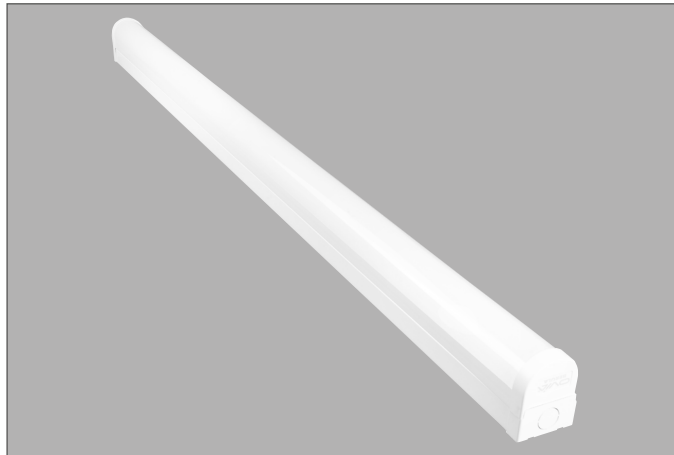

General Information

Dimensions (mm)	1200 (L) x 63 (W) x 80 (D)
Materials	Base: Powder Coated Aluminium; Opaque Diffuser: Polycarbonate
Colour	(RAL9003)
Base Finish	White
Product Weight (Kg)	1.22
Ingress Protection	IP20
Impact Rating (IK)	06
Flammability Rating	TP(a)
Mounting	Ceiling or Wall
Warranty (Years)	5
Battery Warranty (Years)	2

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50)
Safety Class	I
Circuit Wattage (W)	24/29/34/39
Input Current (A)	250
Inrush Current	60A (5ms)
Power Factor	0.9
Efficiency (%)	90
Operating Temperature (°C)	0 to +45
Maximum Critical Temperature (°C)	80
Input Terminations	Push-fit Terminals
LED Driver	Integrated

Compatible Accessories

OSUSS15 - 2 x Suspension Cable for Linear Luminaires

Luminaire Output

LED Wattage	20	25	30	35
Circuit Wattage	24	29	34	39
Typical Luminous Flux (3000K)	2200	2750	3300	3850
Typical Luminous Flux (4500K)	2400	3000	3600	4200
Typical Luminous Flux (6500K)	2200	2750	3300	3850
Efficacy (3000K)	91	94	97	98
Efficacy (4500K)	100	103	105	107
Efficacy (6500K)	91	94	97	98
Beam Angle (°)	120			
Colour Temperatures (K)	3000, 4500, 6500			
Flicker Free	Yes			
Colour Rendering Index (CRI)	80			
LED Lifetime (L70)	50000			

Dimming Information


Dimmable	No
----------	----

Sensor Information


Light Level Settings (Lux)	2, 10, 50, Disable
HF System	5.8GHZ;<0.3Mw
Time Delay Settings	5s / 90s / 5min / 15min

Emergency Backup Information


Emergency Luminous Flux (lm)	280
Battery Specification	6.4V 1500mAh LiFePO4
Minimum Duration (Hours)	3
Battery Warranty (Years)	2

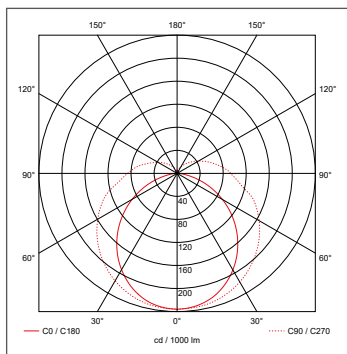


24W

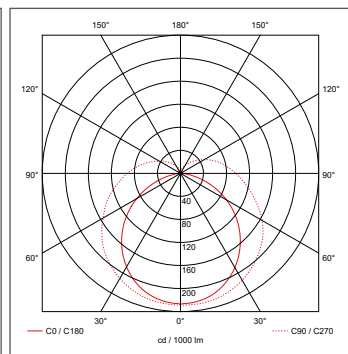

29W

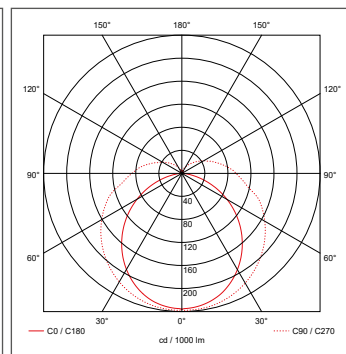

34W

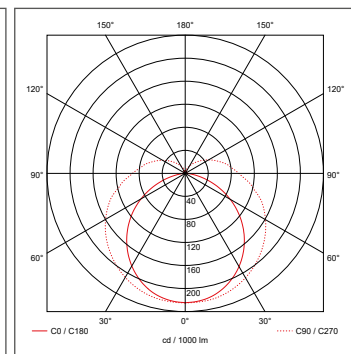

39W



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 300640
E: sales@oviaUK.com | W: oviaUK.com



Catalogue



Section



DoC



Installation

