
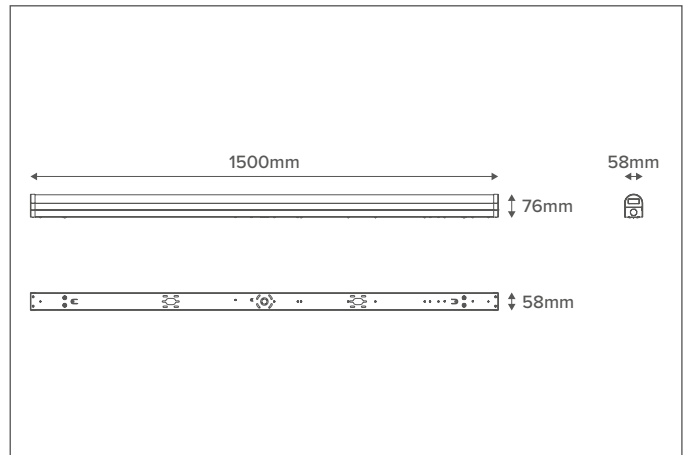


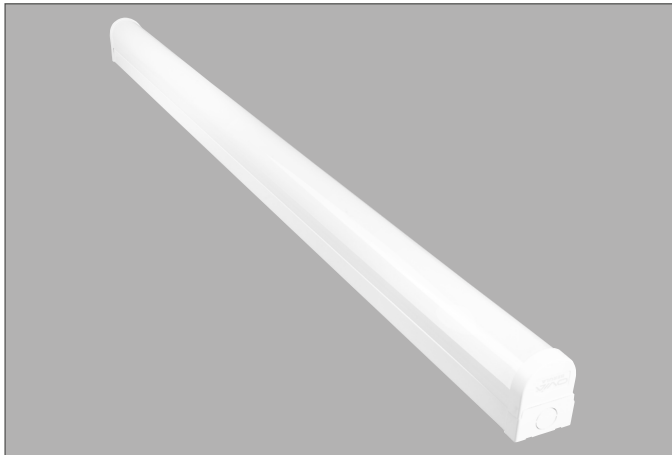

General Information

Dimensions (mm)	1500 (L) x 63 (W) x 80 (D)
Materials	Base: Powder Coated Aluminium; Opaque Diffuser: Polycarbonate
Colour	(RAL9003)
Base Finish	White
Product Weight (Kg)	1.26
Ingress Protection	IP20
Impact Rating (IK)	06
Flammability Rating	TP(a)
Mounting	Ceiling or Wall
Warranty (Years)	5

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50)
Safety Class	I
Circuit Wattage (W)	30/37/45/52
Input Current (A)	350
Inrush Current	60A (5ms)
Power Factor	0.9
Efficiency (%)	90
Operating Temperature (°C)	-20 to +45
Maximum Critical Temperature (°C)	80
Input Terminations	Push-fit Terminals
LED Driver	Integrated

Luminaire Output


LED Wattage	30	37	45	52
Circuit Wattage	30	37	45	52
Typical Luminous Flux (3000K)	3300	4070	4950	5720
Typical Luminous Flux (4500K)	3600	4440	5400	6240
Typical Luminous Flux (6500K)	3300	4070	4950	5720
Efficacy (3000K)	110	110	110	110
Efficacy (4500K)	120	120	120	120
Efficacy (6500K)	110	110	110	110
Beam Angle (°)	120			
Colour Temperatures (K)	3000, 4500, 6500			
Flicker Free	Yes			
Colour Rendering Index (CRI)	80			
LED Lifetime (L70)	50000			

Dimming Information


Dimmable	No
----------	----

Compatible Accessories


OSUSS15 - 2 x Suspension Cable for Linear Luminaires




30W



37W



45W

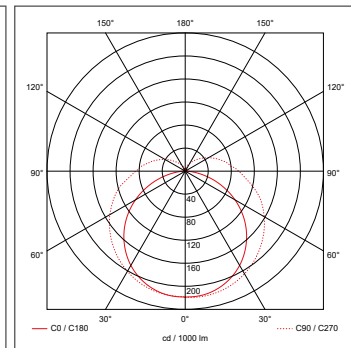

52W



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom

T: +44 (0)1827 300640

E: sales@oviaUK.com | W: oviaUK.com



Catalogue



Section



DoC



Installation

