
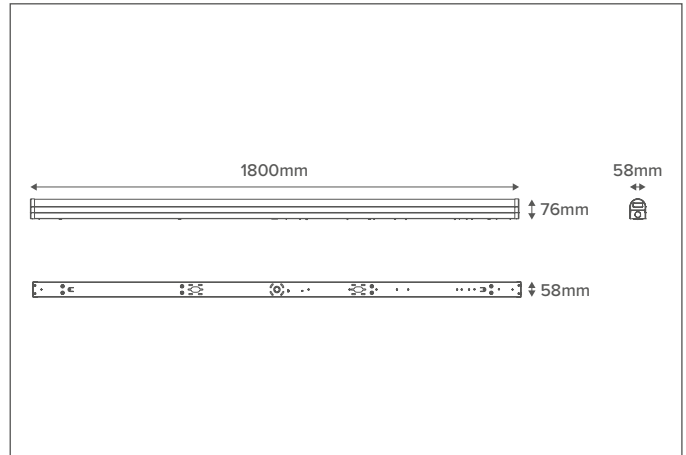


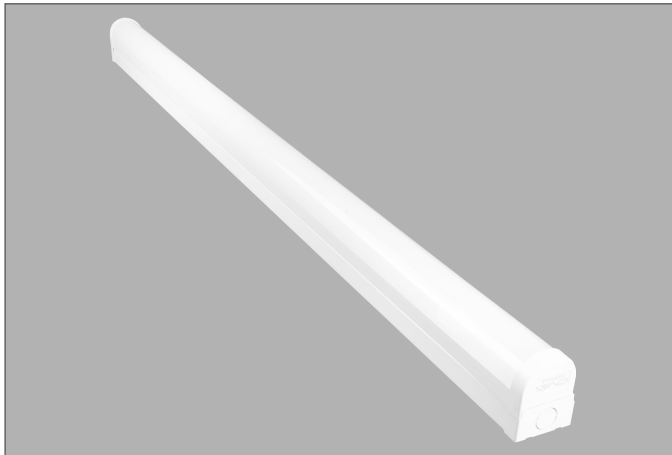

General Information

Dimensions (mm)	1800 (L) x 63 (W) x 80 (D)
Materials	Base: Powder Coated Aluminium; Opaque Diffuser: Polycarbonate
Colour	(RAL9003)
Base Finish	White
Product Weight (Kg)	1.63
Ingress Protection	IP20
Impact Rating (IK)	06
Flammability Rating	TP(a)
Mounting	Ceiling or Wall
Warranty (Years)	5
Battery Warranty (Years)	2

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50)
Safety Class	I
Circuit Wattage (W)	39/48/57/65
Input Current (A)	250
Inrush Current	60A (5ms)
Power Factor	0.9
Efficiency (%)	90
Operating Temperature (°C)	0 to +45
Maximum Critical Temperature (°C)	80
Input Terminations	Push-fit Terminals
LED Driver	Integrated

Luminaire Output

LED Wattage	35	44	53	61
Circuit Wattage	39	48	57	65
Typical Luminous Flux (3000K)	3850	4840	5830	6710
Typical Luminous Flux (4500K)	4200	5280	6360	7320
Typical Luminous Flux (6500K)	3850	4840	5830	6710
Efficacy (3000K)	98	100	102	103
Efficacy (4500K)	107	110	111	112
Efficacy (6500K)	98	100	102	103
Beam Angle (°)	120			
Colour Temperatures (K)	3000, 4500, 6500			
Flicker Free	Yes			
Colour Rendering Index (CRI)	80			
LED Lifetime (L70)	50000			

Dimming Information


Dimmable	No
----------	----

Emergency Backup Information


Emergency Luminous Flux (lm)	280
Installation	Can be wired as maintained or non-maintained
Battery Specification	6.4V 1500mAh LiFePO4
Minimum Duration (Hours)	3
Battery Warranty (Years)	2

Compatible Accessories


OSUSS15 - 2 x Suspension Cable for Linear Luminaires




39W



48W



57W

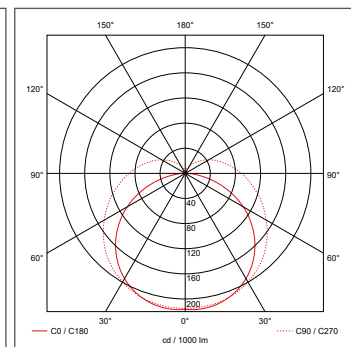

65W



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,

Tamworth, Staffordshire, B79 7UL United Kingdom

T: +44 (0)1827 300640

E: sales@oviaUK.com | W: oviaUK.com



Catalogue



Section



DoC



Installation

