
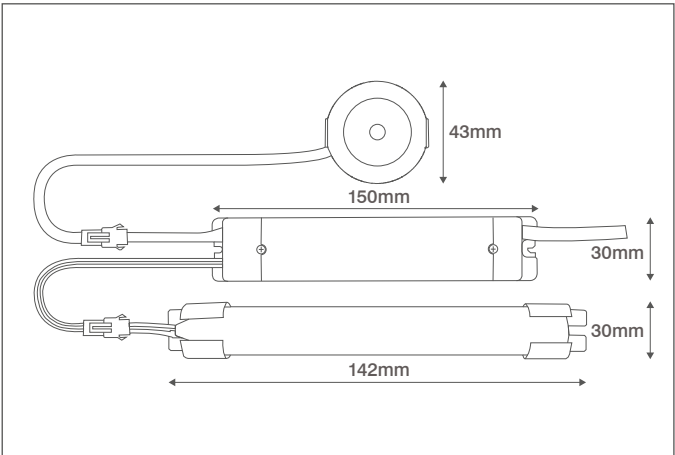


Product Code: OEI30

Luckinslive 435940609

Description: 3W Emergency LED Non-Maintained Open Downlight

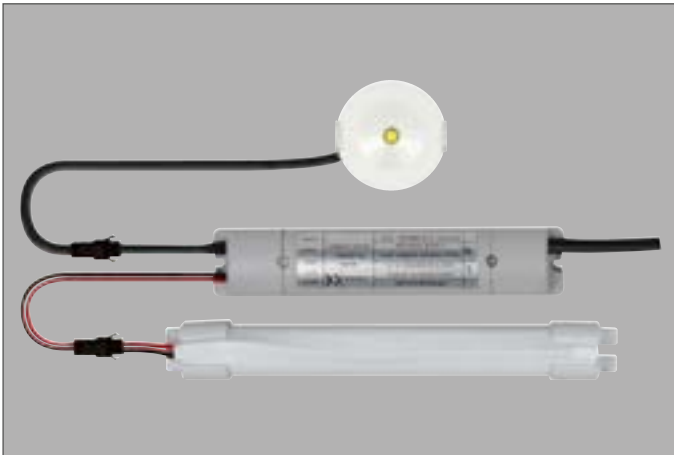

General Information

Dimensions (mm)	150 (L) x 30 (W) x 30 (D)
Materials	Downlight: Polycarbonate
Finish	White, Black & Silver
Product Weight (Kg)	0.3
Cutout Diameter (mm)	35
Recess Depth (mm)	30
Ingress Protection	IP20
Warranty (Years)	5

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50/60)
Safety Class	II
Circuit Wattage (W)	3
Operation Mode	Non-maintained Only
Operating Temperature (°C)	0 to +40
Maximum Critical Temperature (°C)	+70

Luminaire Output

Colour Temperature (K)	5500
Beam Angle (°)	120
LED Lifetime (L70) (Hours)	30000

Emergency Backup Information

Emergency Luminous Flux (lm)	130
Battery Specification	3.2V 1500mAh Lithium (LiFePO4) Battery
Minimum Duration (Hours)	3

Compatible Accessories

OEI3CP-W - 3W Emergency Downlight Adapter Plate - White
OEI3CP-B - 3W Emergency Downlight Adapter Plate - Black
OEB3215L - 3.2V 1500mAh Lithium (LiFePO4) Battery



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 300640
E: sales@oviaUK.com | W: oviaUK.com



Catalogue



Section



DoC



Installation

