

JC100003

## Skypack QR HO

Skypack QR High Output 4ft Single IP20 4000K 30W 4000lm 1-10V

### Features & Benefits

- Intelligent press release buttons for simple installation
- Ultra efficient up to 133 lumens per circuit Watt
- Suspended LED tray for easy installation
- Press fit terminals loop in loop out
- Rear and end conduit entry points
- Emergency and microwave dimmable options



### General Information

Mounting

Surface Mounted

Trade Name

Skypack™ QR High Output

Environment

Indoor

Product Group

LED - Surface

Color Finish

White

Product Shape

Rectangular

Product Range

Skypack™

Overall Dimensions

1200 x 70 x 76.5

Length (mm)

1200

Width (mm)

70

Height (mm)

76.5

Product Weight(kg)

2.1

Light Source

LED

Light Source Features

White

Recommended product location

Domestic, Commercial and Industrial Applications

Method of fix

Surface with Conduit Entry

IP Rating

IP20

Origin of manufacturer

Made In China

|                                |  |
|--------------------------------|--|
| Warranty                       | 5 Year Warranty (2 year on batteries) (See Website for terms and conditions) |
| Dimming Protocol Compatibility | 1-10V  |
| Driver manufacturer            | 3AAA   |
| LED manufacturer/type          | Runlite 2835   |
| Lighting Product Type 1        | Linear Lighting  |
| Customs Tariff code**          | 9405119090   |

## Electrical

|                                      |                       |
|--------------------------------------|-----------------------|
| Voltage Rating                       | 220-240               |
| Primary Running Current(Amp)         | 0.11-0.28             |
| Inrush current(Amps)                 | 30.4A max             |
| Operating Frequency Hz               | 50/60Hz               |
| Secondary running current(mA)        | 700                   |
| Constant Current or Constant Voltage | CC                    |
| Luminaire Circuit Wattage1           | 30                    |
| Class                                | I                     |
| Total Harmonic Distortion (THD)%     | 5                     |
| EMC Compliant (EN55015)              | Yes                   |
| Power Factor Correction              | 0.98                  |
| Input Electrical Connections         | Live, Earth & Neutral |
| Dimmable                             | Yes, 1-10V dimmable   |

## Thermals

|                                |          |
|--------------------------------|----------|
| Operating Temperature Range °C | 0 to +26 |
|--------------------------------|----------|

## Performance Data

|                                |   |
|--------------------------------|---|
| LED Life (Hours)*              | 54000   |
| Energy Rating                  | This product contains a light source of energy efficiency class E |
| Actual Lumen Output1           | 4000  |
| Lumens Per Circuit Watt1       | 133   |
| Color Rendering Index          | 80-89   |
| CRI: Ra                        | 80  |
| Correlated Colour Temperature1 | 4000K   |
| Beam Angle °                   | 120   |
| LOR (Light Output Ratio) %     | 100   |
| Photometry Available           | Yes   |

## Construction



|                  |               |
|------------------|---------------|
| Primary Material | Steel         |
| Outer Diffuser   | Polycarbonate |

## Packaging

|                                     |                |
|-------------------------------------|----------------|
| Quantity Per Outer Carton           | 10             |
| Outer carton(L)- cm                 | 127.5          |
| Outer carton(W)- cm                 | 50.5           |
| Outer carton(H)- cm                 | 23             |
| Outer carton Net weight- kg         | 21             |
| Outer carton Gross weight- kg       | 22             |
| Product Bar Code EAN-13 Number      | 5052544104480  |
| Outer carton Bar Code ITF-14 Number | 15052544104487 |

Standards & Approvals

|                               |                                  |
|-------------------------------|----------------------------------|
| Manufactured in accordance to | BS EN 60598:2015, 2-1            |
| CE Marked                     | Yes                              |
| UKCA Marked                   | Yes                              |
| Date code/Purchase order No.  | Yes                              |
| WEEE symbol                   | Yes                              |
| Certificate Of Conformity     | Available on request             |
| Accredited Members            | LIA, ISO9001-2015, ISO14001-2015 |

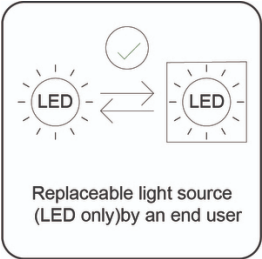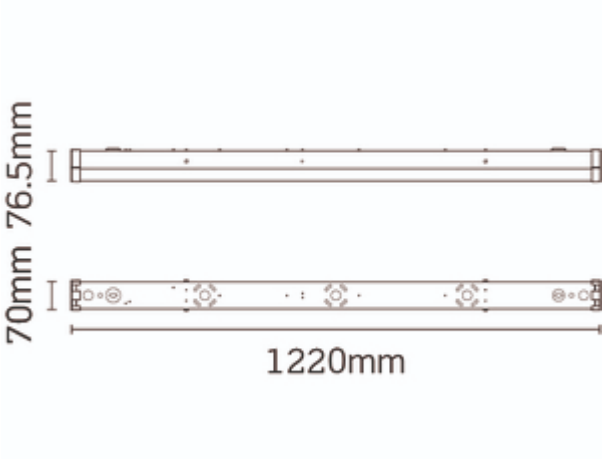

\*Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

\*\*JCC Lighting Limited makes every effort to ensure that the Customs Tariff information in this document is timely and accurate. However, it's not possible for us to assure the absolute veracity and completeness of that information, as errors may occur. The placement of any inaccurate tariff information is completely unintentional. JCC Lighting Limited reserves the right, in its sole discretion, to correct any errors or omissions to the tariff code and to make any and all changes contained in this document at any time and without notice. It is the sole responsibility of the importer to ensure that the commodity code advised is correct for the products/goods being supplied by JCC Lighting Limited. JCC Lighting Limited does not assume any liabilities, losses, costs, and expenses arising out of or related to the importers use of this commodity code or the information related to the import of any JCC Lighting products.

