

JC100011

Skypack QR HO

Skypack QR High Output 4ft Twin IP20 4000K 55W 7260lm 1-10V

Features & Benefits

- Intelligent press release buttons for simple installation
- Ultra efficient up to 133 lumens per circuit Watt
- Suspended LED tray for easy installation
- Press fit terminals loop in loop out
- Rear and end conduit entry points
- Emergency and microwave dimmable options



General Information

Mounting	Surface Mounted
Trade Name	Skypack™ QR High Output
Environment	Indoor
Product Group	LED - Surface
Color Finish	White
Product Shape	Rectangular
Product Range	Skypack™
Overall Dimensions	1200 x 70 x 76.5
Length (mm)	1200
Width (mm)	70
Height (mm)	76.5
Product Weight(kg)	2.1
Light Source	LED
Light Source Features	White
Recommended product location	Domestic, Commercial and Industrial Applications
Method of fix	Surface with Conduit Entry
IP Rating	IP20
Origin of manufacturer	Made In China

Warranty	5 Year Warranty (2 year on batteries) (See Website for terms and conditions)
Dimming Protocol Compatibility	1-10V
Driver manufacturer	3AAA
LED manufacturer/type	Runlite 2835
Lighting Product Type 1	Linear Lighting
Customs Tariff code**	9405119090

Electrical

Voltage Rating	220-240
Primary Running Current(Amp)	0.299-0.407
Inrush current(Amps)	38A
Operating Frequency Hz	50/60Hz
Secondary running current(mA)	1400
Constant Current or Constant Voltage	CC
Luminaire Circuit Wattage1	55
Class	I
Total Harmonic Distortion (THD)%	5
EMC Compliant (EN55015)	Yes
Power Factor Correction	0.98
Input Electrical Connections	Live, Earth & Neutral
Dimmable	Yes, 1-10V dimmable

Thermals

Operating Temperature Range °C	0 to +26
--------------------------------	----------

Performance Data

LED Life (Hours)*	54000
Energy Rating	This product contains a light source of energy efficiency class E
Actual Lumen Output1	7260
Lumens Per Circuit Watt1	132
Color Rendering Index	80-89
CRI: Ra	80
Correlated Colour Temperature1	4000K
Beam Angle °	120
LOR (Light Output Ratio) %	100
Photometry Available	Yes

Construction



Primary Material	Steel
Outer Diffuser	Polycarbonate

Packaging

Quantity Per Outer Carton	10
Outer carton(L)- cm	127.5
Outer carton(W)- cm	50.5
Outer carton(H)- cm	23
Outer carton Net weight- kg	21
Outer carton Gross weight- kg	22
Product Bar Code EAN-13 Number	5052544104565
Outer carton Bar Code ITF-14 Number	15052544104562

Standards & Approvals

Manufactured in accordance to	BS EN 60598:2015, 2-1
CE Marked	Yes
UKCA Marked	Yes
Date code/Purchase order No.	Yes
WEEE symbol	Yes
Certificate Of Conformity	Available on request
Accredited Members	LIA, ISO9001-2015, ISO14001-2015

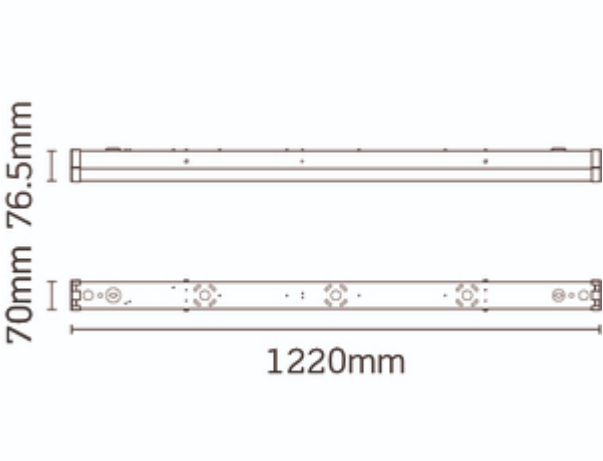

*Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

**JCC Lighting Limited makes every effort to ensure that the Customs Tariff information in this document is timely and accurate. However, it's not possible for us to assure the absolute veracity and completeness of that information, as errors may occur. The placement of any inaccurate tariff information is completely unintentional. JCC Lighting Limited reserves the right, in its sole discretion, to correct any errors or omissions to the tariff code and to make any and all changes contained in this document at any time and without notice. It is the sole responsibility of the importer to ensure that the commodity code advised is correct for the products/goods being supplied by JCC Lighting Limited. JCC Lighting Limited does not assume any liabilities, losses, costs, and expenses arising out of or related to the importers use of this commodity code or the information related to the import of any JCC Lighting products.

