

JC130013PC

Commercial Wall Pack Bulkhead Emergency

Novium 13/18/28W IP65 IK10 3000/4000K Emergency Photocell Black

Features & Benefits

- Multiple Wattage selectable
- Two colour selectable
- Downward beam angle aids in reduction of light pollution
- IP65 and IK10
- Up to 139 LpcW



General Information

Mounting	Wall mounted
Environment	Demanding
Suitable For Zones	Suitable for inside Zone 1
Product Group	LED Bulkhead
Color Finish	Black
Product Range	LED Wall Pack Bulkhead
IK Rating	IK10
Overall Dimensions	165.3 x 263 x 318mm
Width (mm)	165.3
Height (mm)	263
Depth (mm)	318
Product Weight(kg)	2.35
Light Source	LED
Light Source Features	Colour Selectable
Recommended product location	Exterior wall mount
Method of fix	Wall plate and screw fix

IP Rating	IP65
Origin of manufacturer	China
Warranty	5 Year Warranty (See Website for terms and conditions)
Driver manufacturer	TCI
LED manufacturer/type	2835
Lighting Product Type 1	Wall Mount

Electrical

Voltage Rating	220-240
Primary Running Current(Amp)	0.13
Inrush current(Amps)	10
Operating Frequency Hz	50/60Hz
Secondary running current(mA)	350/500/725
Constant Current or Constant Voltage	CC
Luminaire Circuit Wattage1	13
Luminaire Circuit Wattage2	18
Luminaire Circuit Wattage3	28
Class	I
Output Voltage Max/Range (VDC)	33-37.2
Total Harmonic Distortion (THD)%	10
EMC Compliant (EN55015)	Yes
Power Factor Correction	0.9
Input Electrical Connections	Unswitched live, earth, switched live, neutral
Dimmable	No
Photocell/PIR compatible	With Photocell -70 lux dusk til dawn operation

Emergency Data

LOR % in Emergency Mode	11/9/8/7
Minimum Battery run time	3

Battery Data

Battery Specification	6.4V 1500mA
Battery Type	Li-ion(Lithium-ion)
Nominal battery current	1500mA
Deep Discharge Protection	Yes

Thermals

Operating Temperature Range °C	-20 to +40
--------------------------------	------------

Performance Data

LED Life (Hours)*	60000
Energy Rating	This product contains a light source of energy efficiency class C
Actual Lumen Output1	1700

Actual Lumen Output2	2500
Actual Lumen Output3	3500
Lumens Per Circuit Watt1	131
Lumens Per Circuit Watt2	139
Lumens Per Circuit Watt3	125
Standard Deviation Colour Matching - SDCM	>6
CRI: Ra	80
Correlated Colour Temperature1	3000
Correlated Colour Temperature2	4000K
Beam Angle °	120
Photometry Available	Yes

Construction


Primary Material	Aluminium
Outer Diffuser	Polycarbonate
Driver Housing	Polycarbonate


Packaging

Product carton overall dimensions(cm)	29.5 x 28 x 17.5cm
Product Packaged Weight(kg)	2.62
Quantity Per Outer Carton	4
Outer carton(L)- cm	63
Outer carton(W)- cm	36.5
Outer carton(H)- cm	37.5
Outer carton Net weight- kg	9.4
Outer carton Gross weight- kg	10.5
Product Bar Code EAN-13 Number	5052544122729
Outer carton Bar Code ITF-14 Number	15052544122726

Standards & Approvals

Manufactured in accordance to	BS EN 60598-2-1, 2-22
CE Marked	Yes
UKCA Marked	Yes
Date code/Purchase order No.	Yes
WEEE symbol	Yes
Certificate Of Conformity	Available on request
Accredited Members	LIA, ISO9001-2015, ISO14001-2015

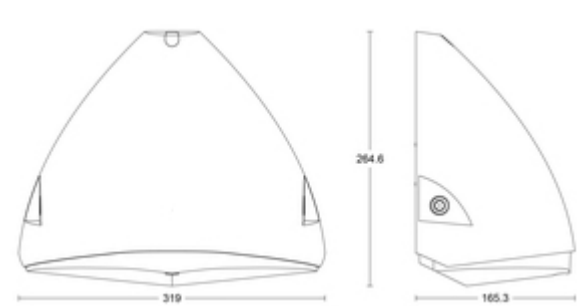



*Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

JCC Lighting LTD, Lux Park, Chichester Business Park, City Fields Way, Tangmere, Chichester, West Sussex, PO20 2FT.
Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk
Company Registration Number: 03044848 | VAT Number: 918544112

This document is uncontrolled if printed, all information is subject to change

Version 61 [26/03/2025]