

Lara Vario Flex

Circular IP65 LED Bulkhead



With many different options, Lara is the ultimate choice for a range of indoor and outdoor settings

- **FLEX Feature (Lumen switch):** Decide on your lumen package per lumen switch directly on site for two sizes (250 mm and 300 mm)
- **VARIO Feature (colour temperature switch):** 3000 K (warm white), 3500 K or 4000 K (neutral white)
- Opal diffuser for homogeneous distribution effect and visual comfort
- Sealed to IP65 for added protection in exterior applications
- Robust construction with up to IK10 impact resistance
- White Body with optional trim or eyelid (both in black or white)
- Optional with 3h emergency kit and sensor option
- Compatible with BESA Box



CCT switch
(3000 K, 3500 K
and 4000 K)



Lumen switch
(2 sizes with
switchable
lumen pack-
ages)



50 000 h lifetime
before luminous
flux is reduced
to 80 % of the
initial value



IP65:
Dust tight and
water resistant



Up to IK10
impact
resistance



Optional
sensor and 3 h
emergency kit
available as
accessory

Ideal for ...



Circulation
corridors



Stairwells



Underpasses



Public entrance
areas



Light source information

- Flex (Lumen switch):

250mm	800lm	1000lm	1200lm
300mm	1200lm	1800lm	2200lm
- Vario: 3000 K, 3500 K & 4000 K
- Efficiency up to 115 lm/W
- Lifetime 50 000 hours (@L80, Ta 25°C)
- CRI80

Specification

- Class II electrical
- IP65
- IK10
- ENEC certified driver
- Ambient operating temperature: -20 to +40 °C (E3: 0 to +25 °C)

Installation/Mounting

- Suitable for wall or ceiling mounting
- Quick and easy installation
- Suitable for BESA fixing


Material/Finish

Body & Diffuser:
UV Stabilized Polycarbonate



LARA LED 250
LARA LED 300


Ø
250
300



Facilitating life

A sensor to fulfill all your needs and requirements

Easy to program via dip switches directly on the sensor itself to suit various indoor and outdoor applications.

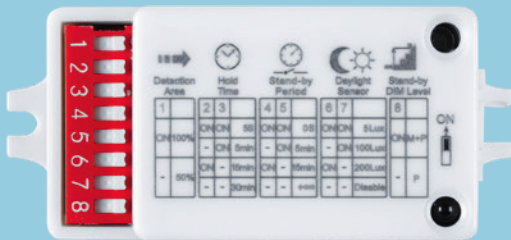

Ordering guide

Description	SAP Code	
LARA VARIOFLEX 250 1200 830/35/40	LA1200ZVF	
LARA VARIOFLEX 250 1200 830/35/40 MWS	LA1200ZMVF	
LARA VARIOFLEX 300 2200 830/35/40	LA2200ZVF	
LARA VARIOFLEX 300 2200 830/35/40 MWS	LA2200ZMVF	
Accessories	WH	BLK
LARA BEZEL TRIM 250	LASA250BEZW	LASA250BEZB
LARA BEZEL TRIM 300	LASA300BEZW	LASA300BEZB
LARA EYELID TRIM 250	LASA250EYEW	LASA250EYEB
LARA EYELID TRIM 300	LASA300EYEW	LASA300EYEB
LARA E3 KIT SELFTEST LIFEPO4	LASAE3TLIFEKIT	



MWS: microwave presence sensor
BLK: black; WH: white

Controllability (default)

	Detection Area	100 % / 50 %
	Hold Time	5s(testing) / 5 min / 15 min / 30 min
	Standby level corridor function	10 %
	Standby period	0 s / 5 min / 15 min / never off
	Daylight Sensor	OFF: MWS only
		5 on / 7,5 off lux: external pedestrian walkway
		100 on / 150 off lux: Internal Circulation Areas (corridors and stairs), Stockrooms and Storerooms
		200 on / 300 off lux: Internal Washrooms, Toilets and Cloakrooms
MODE	Mode	Microwave Sensor + Daylight / Photocell only

Sensor Range

at 100 % sensitivity



Portfolio overview

