

LIGHTSPAN+ T8 BATTEN 5FT EM3HR POWER & CCT ADJUSTABLE - 30/52W & 3000/4000/6300K 120 BEAM LINKABLE NON-DIMM INTEGRAL

ILBTC131



Integral Lightspan+ battens provide an exceptionally efficient alternative to equivalent fluorescent fixtures. With switchable Power & CCT, they are ideal for indoor commercial, industrial and retail spaces that need different colour temperature and lumen output to suit the activity. With an efficacy of up to 145lm/W, Lightspan+ battens offer huge energy savings compared to equivalent fluorescent lighting.

Details

Quick Order Code:	240589
Barcode:	5055788261063
Category:	Luminaires
Range Name:	Lightspan+
Type:	Single / Twin
Product Body Finish:	Matt white
Market Segment:	Indoor commercial, Industrial, residential
Features:	Power & CCT Swtichable
Warranty (Years):	5
CE RoHS:	Yes

Physical Data

Product Length (mm):	1470
Product Depth (mm):	71
Product Width (mm):	60
Product Weight (g):	2300
Optic:	Polycarbonate diffuser
Material:	Steel, Polycarbonate
Construction:	Folded Mild Steel and Polycarbonate diffuser
Bulb or Luminaire Shape:	Linear
Luminaire Fixing:	Ceiling mounted
Placement / Application:	Indoor, General Lighting

Electrical Data

Power Consumption (w):	30/52
Power Factor:	0.9
Input Voltage (V):	200-240



Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-60598
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	3750/4350/3750 & 6500/7540/6500
Correlated Colour Temperature (CCT) (K):	3000/4000/6300
Colour Temperature:	3000/4000/6300 - Warm White/Cool White/Cool Daylight
Colour Temperature Name:	Warm White/Cool White/Cool Daylight
Beam Angle:	120
Colour Rendering Index (CRI):	80
Frequency Range (Hz):	50/60
Instant on (Less than 1 second):	Yes
LED Size (mm):	2835
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	50000
Switching Cycles:	25000

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
New Energy Rating:	D
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK08
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

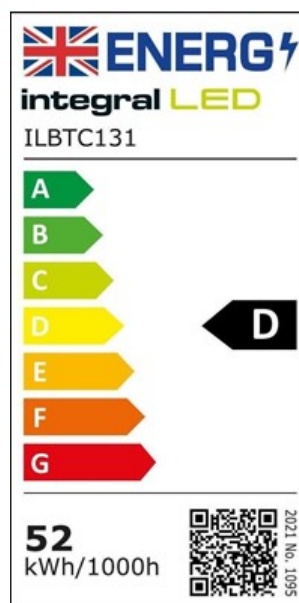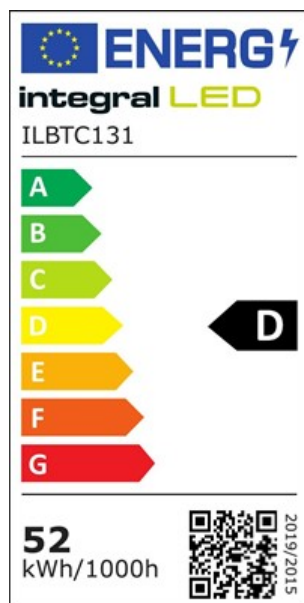

Packaging

[Portal.integral-led.com](https://portal.integral-led.com)

Package Weight (g): 2400

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Length (mm):	1475
Package Width (mm):	68
Package Depth (mm):	79