



AFRLED230/WW

Freska Downlight Warm White 230mm White



Features

Economic ultra-slim circular LED performance downlight suitable for semi commercial applications

Ideal for use in areas with shallow ceiling void.

Remote driver with plug and play connection

Edge lit providing excellent uniform illumination

Non-dimmable


Optional plug-in self-test emergency pack suitable for all three models

General Information

Lamp Type	LED
Colour / Finish	White
IP Rating	IP44
IK Rating	IK02
Class Protection	2
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Lifetime (Hrs)	L70 B50 60,000h
Warranty (Years)	3
CE Mark	Yes
Diameter (mm)	240 mm
Height (mm)	25 mm
Accessories	AFRLED/M3/ST

Technical Information

Wattage	19W
Lumens Delivered	1500lm
Lm/W	80lm/W
Beam Angle	110
CRI	80
CCT	3000K
Input	220/240V
Hertz	50/60Hz
Operating Temp	-10°C to 25°C
SDCM	5
UGR	27

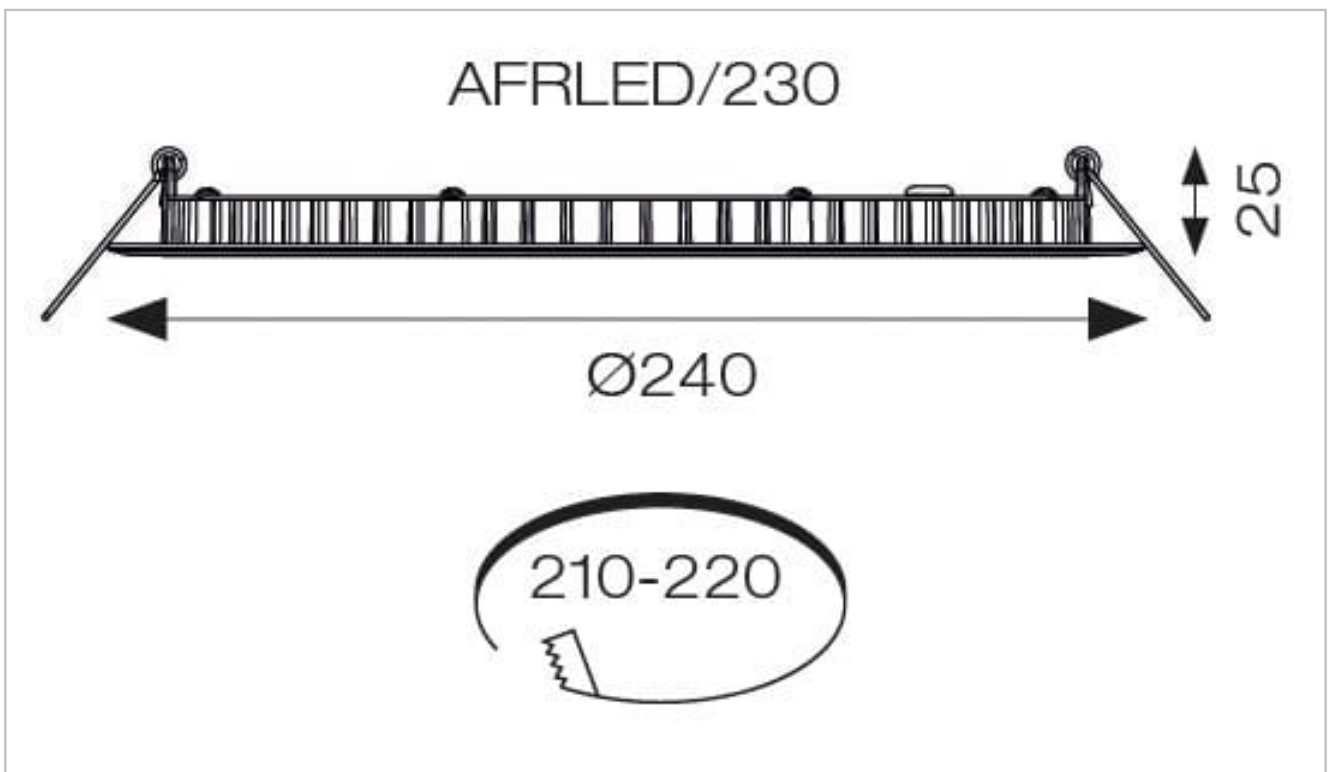

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 6, 2022 8:27:02 AM