

-PowerBreaker-

Dual High Integrity Consumer Unit with Type 2 SPD

The PBPH22 is our Dual High Integrity Unit supplied with type 2 SPD - 22 modules and the PBPH18 is the 18 module unit.

- SPD - Type 2
- SPD protection (32A MCB)
- 2P Mains Switch 100A
- 2 x RCCB 100A, Type A, 30mA
- 3 x Neutral bars
- Detachable Spirit level
- Plus label kit
- 3 year Guarantee



PBPH22


18th Wiring Regulations Compliant



Metal Enclosure



Detachable Spirit Level



Consumer Unit Board Modules

Blanking Module	MCB	RCCB (RCBO)	Space for RCBO	32A MCB for SPD	Main Switch	SPD
-----------------	-----	-------------	----------------	-----------------	-------------	-----

PBPH18 Consumer Unit Contents:-

- 8 MCB's - 1 x 40A, 3 x 32A, 1 x 16A, 3 x 6A
- 80A RCCB wiring kit - 16mm² cable
- 2 x Module blanking plates
- 2 Free spaces - for RCBO's

PBPH18 - 18 Module Board Layout

6A	16A	32A	32A			6A	6A	32A	40A					32A			
----	-----	-----	-----	--	--	----	----	-----	-----	--	--	--	--	-----	--	--	--

PBPH22 Consumer Unit Contents:-

- 10 MCB's - 1 x 40A, 4 x 32A, 2 x 16A, 3 x 6A
- 100A RCCB wiring kit - 25mm² cable
- 4 x Module blanking plates
- 4 Free spaces - 2 for MCB's & 2 for RCBO's

PBPH22 - 22 Module Board Layout


	6A	16A	32A	32A	32A				6A	6A	16A	32A	40A					32A			
--	----	-----	-----	-----	-----	--	--	--	----	----	-----	-----	-----	--	--	--	--	-----	--	--	--

-PowerBreaker-

Dual High Integrity Consumer Unit with Type 2 SPD

16 - 18 Way Dimensions

For consumer Units - PBPH18

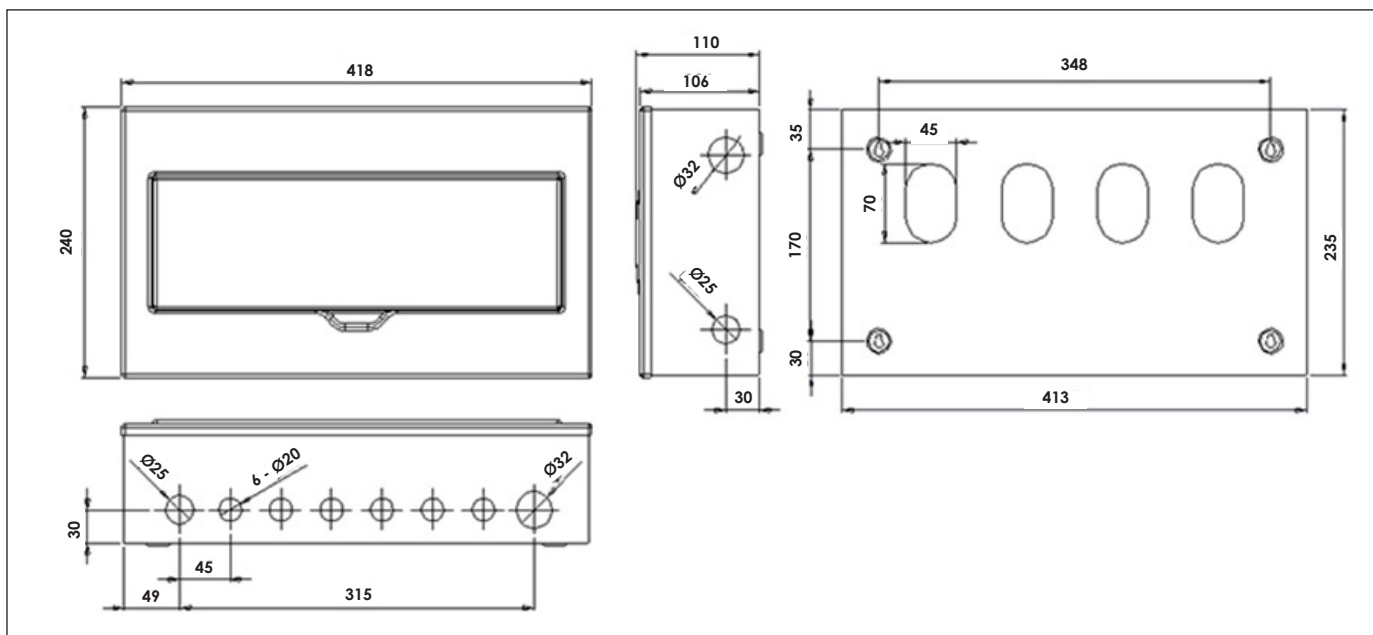

20 - 22 Way Dimensions

For consumer Unit - PBPH22

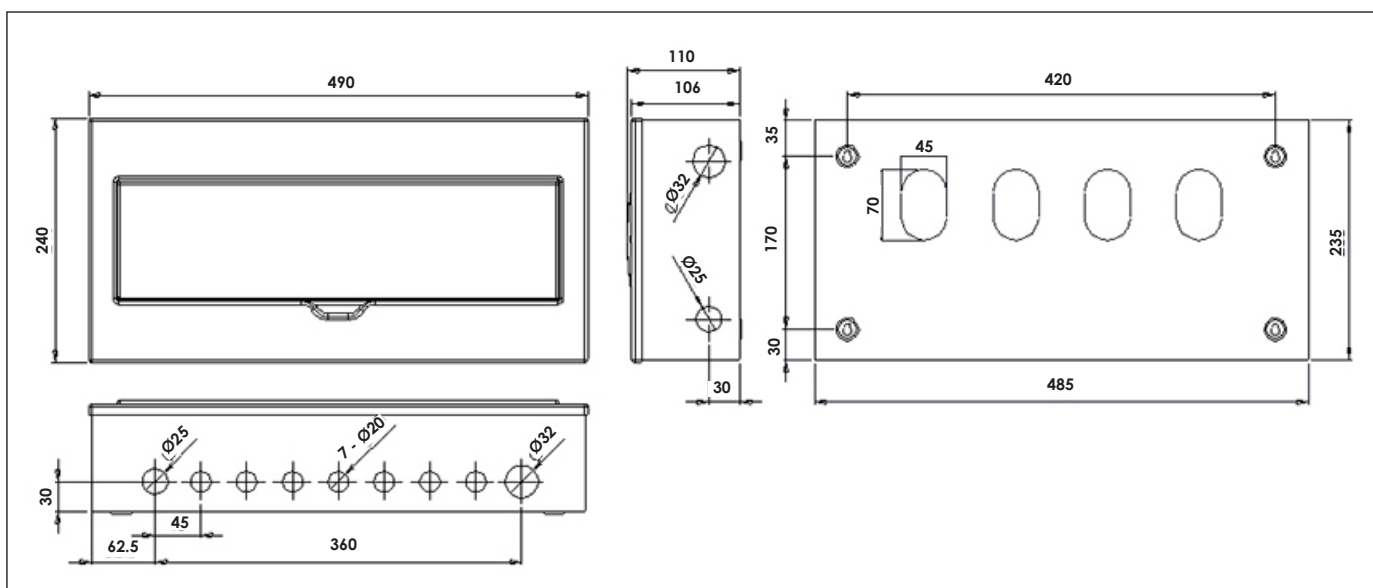


Image showing
Closed PBPH22

**GREEN
BROOK**
ELECTRICAL

Tel: 01279 772 772

Fax: 01279 422 007

Email: sales@greenbrook.co.uk

www.greenbrook.co.uk



Technical Information

	PBPH18	PBPH22
Description	Dual High Integrity Consumer Unit with Type 2 SPD	Dual High Integrity Consumer Unit with Type 2 SPD
Barcode	5012739 648786	5012739 648793
Weight		
Impact Rating	IK 05	
IP Rating	IPX4	
Colour	White Ral 9003	
Enclosure	Steel	
Guarantee	3 Years	
Conforms To	BS EN 61439-3	