




## **Aztec Coastal Asymmetric**

Aztec Coastal Asymmetrical Floodlight 200W Code: AAZCLED200/ASY

| Category      | Floodlights                                   |  |
|---------------|---|--|
| Application   | Ancillary, Commercial, Education, Healthcare, |  |
|               | Hospitality, Industrial, Outdoor, Retail      |  |
| Specification | Performance                                   |  |

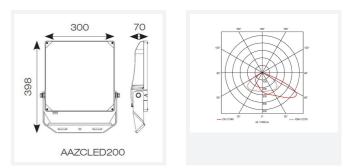

## PRODUCT FEATURES

- High performance die-cast marine grade aluminium LED floodlight suitable for industrial and coastal applications
- Marine grade construction ideal for coastal and adverse weather, swimming pool and chemical plant applications
- Pre-installed breathable gland prevents internal moisture accumulation
- Concentrated saline 3,000 hour salt spray test to EN ISO 9227

| GENERAL INFORMATION |              |  |
|---------------------|--------------|--|
| Wattage             | 200W         |  |
| Lumens Delivered    | 28000lm      |  |
| Lm/W                | 141lm/W      |  |
| Beam Angle          | 60/120       |  |
| CRI                 | 70           |  |
| CCT                 | 5000K        |  |
| Input               | 220/240V     |  |
| Operating Temp      | -30°C - 50°C |  |
| SDCM                | 5            |  |

- 304L stainless steel mounting bracket and fixings
- High output, high efficiency asymmetric lens technology for anti-light pollution
- Pre-wired with 1.5 metre of rubber insulated cable for ease of installation
- High purity aluminium construction, surface electrophoresis and corrosion-proof treatment

| TECHNICAL INFORMATION          |             |  |  |
|--------------------------------|-------------|--|--|
| Light Source                   | LED         |  |  |
| Colour / Finish                | Aluminium   |  |  |
| IP Rating                      | IP66        |  |  |
| Class Protection               | 1           |  |  |
| Internal / External            | External    |  |  |
| Surface / Recessed / Suspended | Pole, Wall  |  |  |
| Lumen Depreciation             | L80 54,000h |  |  |
| Warranty (Years)               | 5           |  |  |
| CE Mark                        | Yes         |  |  |
| Height                         | 398 mm      |  |  |