

# DATASHEET


Code: 8G29SS2AB-B

## Sheer G2 | SHEER G2 RANGE | Power Sockets

### Product Image



### Wiring

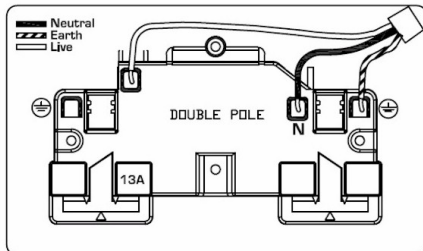

### Dimensions

Insert Type	2 gang 13A Double Pole Switched Socket
Insert Colour	Antique Brass/Black
EAN13 Barcode	5017504097394
Commodity Code	85363010
Dimensions(Nominal)	Double: Height = 85mm Width = 144mm Depth = 1.5mm + 2.7mm Gasket
Weight	245 GR
Fixing Hole Centres	Box Fixing = 120.6mm Grid Fixing = CFX Clips
Switched Poles	Double
Current Rating	13 Amp
Voltage	220/250V AC
Maximum Load	13 Amp
Mains Frequency	50Hz
IP Rating	IP2XD
Contact Gap Minimum	3mm
Terminal Capacity 1	4x2.5mm <sup>2</sup>
Terminal Capacity 2	3x4mm <sup>2</sup>
Terminal Capacity 3	2x6mm <sup>2</sup> Multi-Strand
Terminal Capacity 4	1x10mm <sup>2</sup>
Earth Terminal Capacity 1	4x2.5mm <sup>2</sup>
Earth Terminal Capacity 2	3x4mm <sup>2</sup>
Earth Terminal Capacity 3	2x6mm <sup>2</sup> Multi-Strand
Earth Terminal Capacity 4	1x10mm <sup>2</sup>
Product Class 1	Must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS 1363-2
Additional Notes	Dual Earth: Yes

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,  
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: [info@hamilton-litestat.com](mailto:info@hamilton-litestat.com) | W: [www.hamilton-litestat.com](http://www.hamilton-litestat.com)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of of certain finishes. This datasheet was generated on 4/28/2023 12:13:21 PM E&OE