

JC040203

Toughbay Pro Emergency

Toughbay Pro 100W (75W & 50W) IP65 5700K 90° 1-10V EM ST

Features & Benefits

- 100W, 150W and 200W options available with wattage switch to adjust output where necessary
- Available in 60°, 90° and 120° degree beam angles
- 1-10V dimmable as standard
- Simple toolless conversion to Microwave dim or PIR dim sensing
- Remote control available to control PIR on/off, MW on/off and MW step dim
- Ultra efficient, up to 150 Lumens per circuit Watt
- Emergency options available
- Surface mount bracket also available
- 5 year warranty including 1 year on-site



General Information

Mounting	Suspended or Surface mount
Trade Name	Toughbay™ Pro
Environment	Demanding
Color Finish	Black
IK Rating	IK10
Overall Dimensions	359.4 x 270 x 198 cm
Length (mm)	359.4
Width (mm)	270
Height (mm)	198
Product Weight(kg)	3.35
Light Source	LED
Luminaire Accessories	LEV71950- PIR Sensor, LEV71951- MW Sensor, LEV71808- Sensor Remote Control, JC040224- Surface Mount Bracket
IP Rating	IP65
Origin of manufacturer	Made in China

Warranty	5 Year Warranty(5 year on batteries)(includes 1 year onsite) (see website for terms and conditions)
Dimming Protocol Compatibility	1-10V
Driver manufacturer	JCC
LED manufacturer/type	BMTC 2835
Customs Tariff code**	9405499090

Electrical

Voltage Rating	220-240
Primary Running Current(Amp)	1.6
Inrush current(Amps)	58A@130µs 230V~
Operating Frequency Hz	50/60
Secondary running current(mA)	320/400/480
Constant Current or Constant Voltage	Constant current
Luminaire Circuit Wattage1	100
Luminaire Circuit Wattage2	75
Luminaire Circuit Wattage3	50
Class	Class I
Output Voltage Max/Range (VDC)	180-260
Total Harmonic Distortion (THD)%	<15
EMC Compliant (EN55015)	Yes
Power Factor Correction	0.95
Input Electrical Connections	Live permanent, Live Switched, Earth, Neutral
Dimmable	Yes, 1-10V only

Emergency Data

Load Voltage(DC)	9-42
LOR % in Emergency Mode	Non-maintained EM pack- 899 Lumens output from dedicated light source
Minimum Battery run time	3 hours
Recharge Time	24 hours
Inverter PFC	0.5

Battery Data

Battery Specification	2 cell 6.4V 3.6Ah
Battery Type	LiFePO4
Nominal battery current	90-110mA
Charge Current	200mA
Recharge Time	24 hours
Deep Discharge Protection	Yes
Battery Total Weight(kg)	0.18

Thermals

Operating Temperature Range °C	0°C to +40°C
--------------------------------	--------------

Performance Data

LED Life (Hours)*	60000
Energy Rating	This product contains a light source of energy efficiency class C
Actual Lumen Output1	13650
Actual Lumen Output2	11330
Actual Lumen Output3	8000
Lumens Per Circuit Watt1	137
Lumens Per Circuit Watt2	151
Lumens Per Circuit Watt3	160
Color Rendering Index	80-89
CRI: Ra	82
Correlated Colour Temperature1	5700K
Beam Angle °	90
LOR (Light Output Ratio) %	100
Photometry Available	Yes

Construction





Primary Material	Aluminium
Outer Diffuser	Polycarbonate
Heat Sink	Aluminium
Driver Housing	Aluminium

Packaging

Product Bar Code EAN-13 Number	5052544122972
--------------------------------	---------------

Standards & Approvals

Manufactured in accordance to	BS 60598-1-2-22 -2015
CE Marked	Yes
UKCA Marked	Yes
Date code/Purchase order No.	Yes
WEEE symbol	Yes
Certificate Of Conformity	Available on request
Accredited Members	LIA, ISO9001-2015, ISO14001-2015

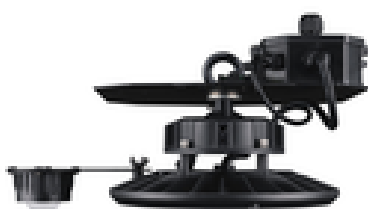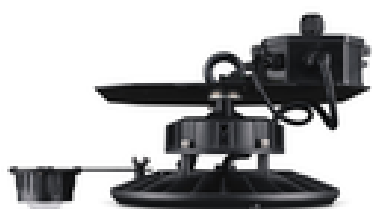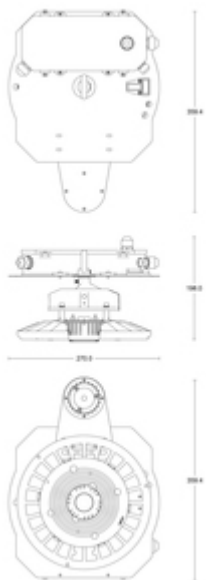



*Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

**JCC Lighting Limited makes every effort to ensure that the Customs Tariff information in this document is timely and accurate. However, it's not possible for us to assure the absolute veracity and completeness of that information, as errors may occur. The placement of any inaccurate tariff information is completely unintentional. JCC Lighting Limited reserves the right, in its sole discretion, to correct any errors or omissions to the tariff code and to make any and all changes contained in this document at any time and without notice. It is the sole responsibility of the importer to ensure that the commodity code advised is correct for the products/goods being supplied by JCC Lighting Limited. JCC Lighting Limited does not assume any liabilities, losses, costs, and expenses arising out of or related to the importers use of this commodity code or the information related to the import of any JCC Lighting products.

JCC Lighting LTD, Lux Park, Chichester Business Park, City Fields Way, Tangmere, Chichester, West Sussex, PO20 2FT.
Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk
Company Registration Number: 03044848 | VAT Number: 918544112

This document is uncontrolled if printed, all information is subject to change

Version 82 [26/03/2025]